


NOTA:

2 PERFILES EN U DE 80x45x6 SOLDADOS EN CAJON.REFORZAR LA SOLDADURA POR EL INTERIOR EN AMBOS EXTREMOS

[illegible]

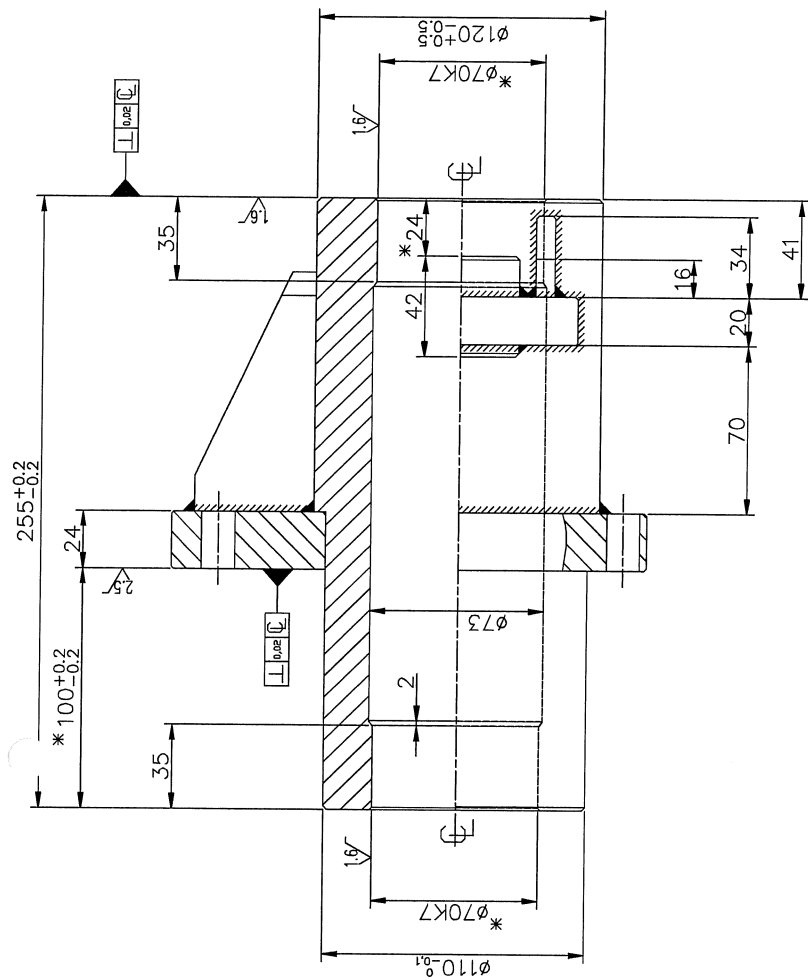

NOTAS:


SOLDAR A CORDON CONTINUO FUERTE


ESTABILIZAR EL CONJUNTO Y MECANIZAR LAS COTAS EN ACABADO *

MATAR ARISTAS CON CHAFLAN DE 1x45°

E24-2

Print

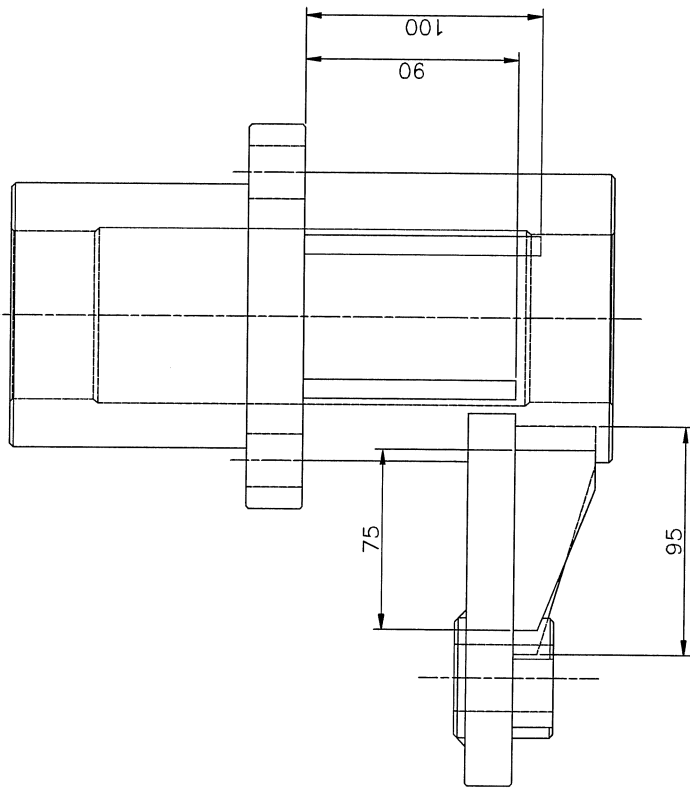[illegible]

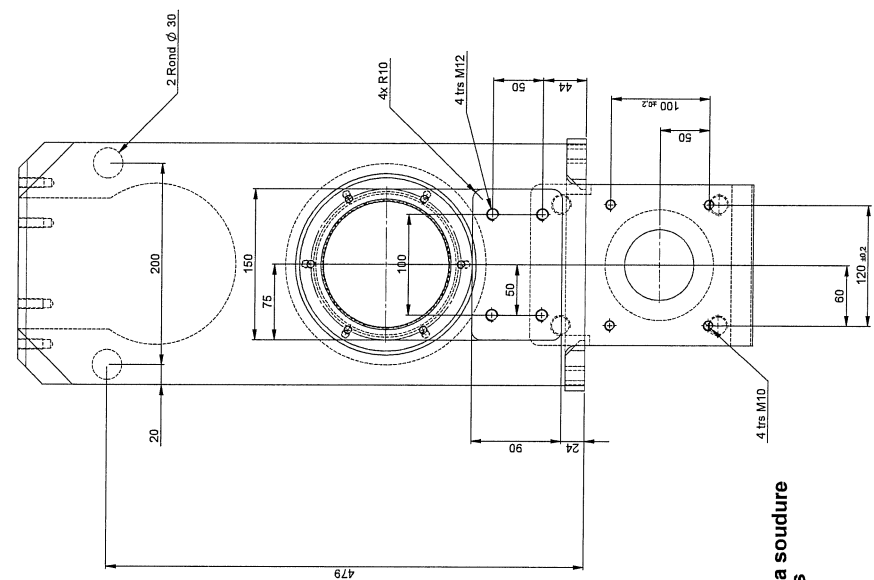

4 trs M10 prof, utile : 25

Utilisage : 2 Trou(s) : Ø 9,5
Montage : Aléser après contre-perçage pour gouille emmanchée glissante


Nouveau Plan

~~STABILISER~~
~~Après soudure~~

49


Qte: 1

Penr

Date	Nom	MODIFICATIONS					
Emission	Reçu	Régularisation					
Émission prioritaire	MARQUE						
Désignation de la pièce :	SUPPORT DE BROCHURE						
Machine : 2.5	Inclinaison :						
Matériau : A1	Poids :						
Révisé :	Reçu :						
							
9, rue de la Sablonnière - Tél.: 02 47 53 06 00 37510 Ballantré-sur-Loire - Fax: 02 47 53 06 07							




Neurcan Plan







Technical drawing of a vertical part with a central hole. The part has a total height of 10 units and a central hole with a diameter of 10 units. The top and bottom edges of the part are chamfered at a 45-degree angle. The drawing shows the part from the front and side views, with the central hole and chamfers clearly indicated.

[illegible]

Novacek Plan.

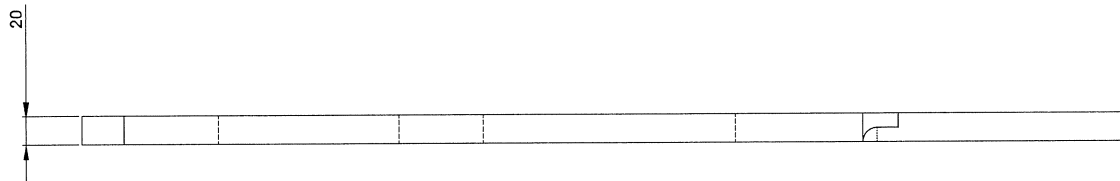[illegible]



Nouveau Plan

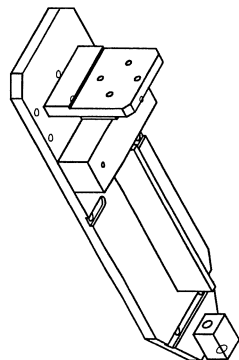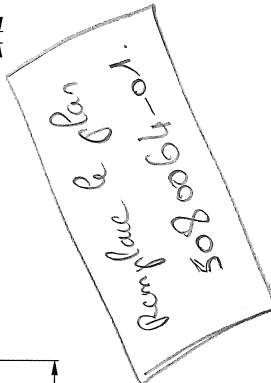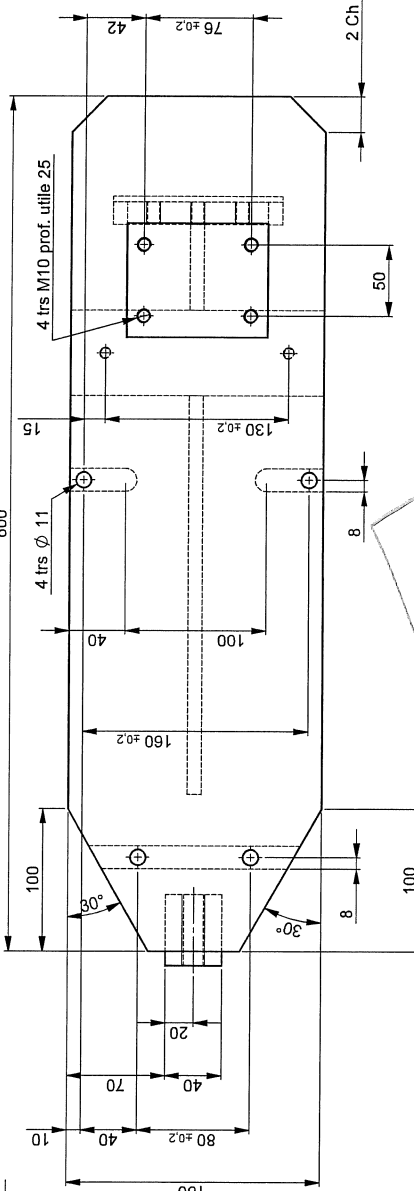[illegible]

READ

9, Rue de la Sublinerie - Tél : 02 47 53 68 00
37510 Ballan-Miré - Fax : 02 47 53 66 87
www.appi-net.fr

15-2862-202

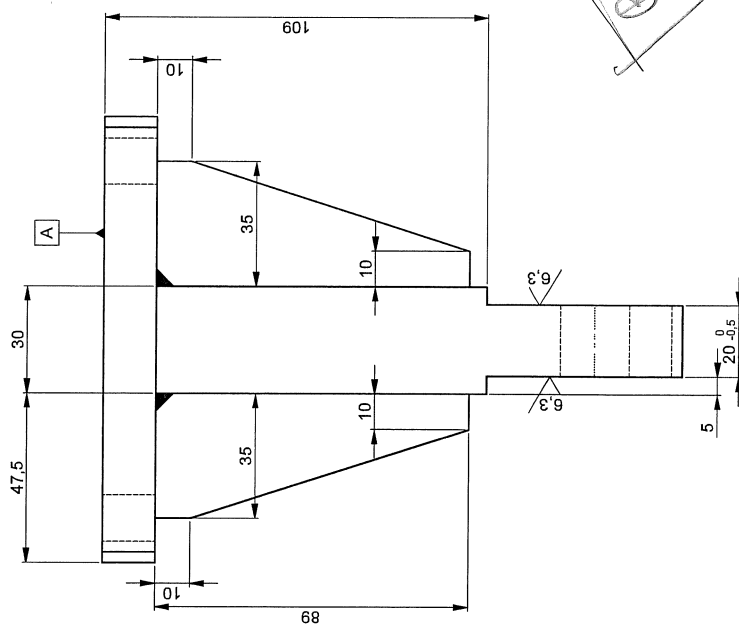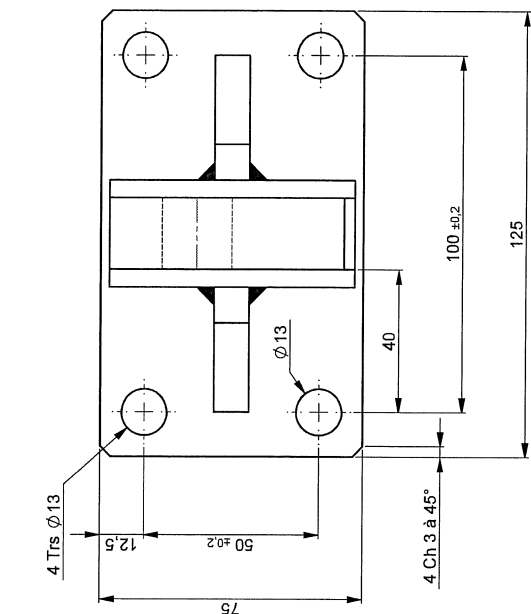


3 = 3

STABILISER
Après souduure

[illegible]


0607-000-10900
Rajeev Dhanraj V3N


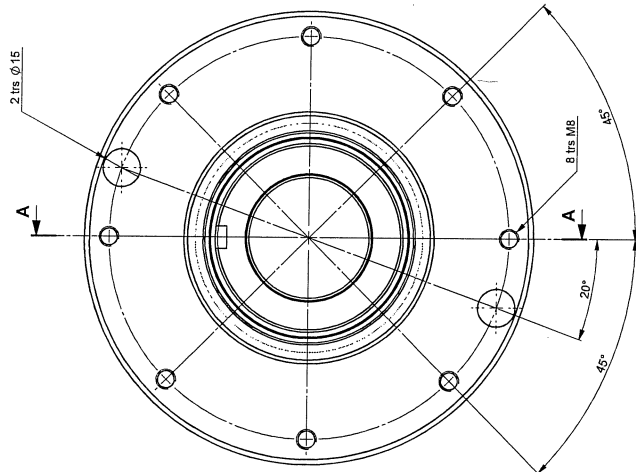


600000
 200000
 400000

SAUF INDICATION CONTRAIRE
LES SOUDURES SERONT CONTINUES

~~STABILISER~~
Après soudure

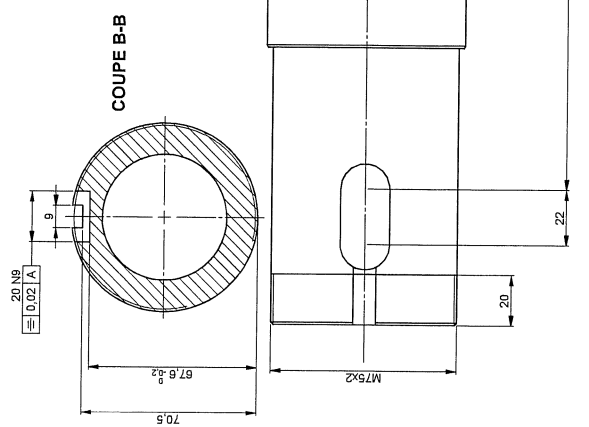[illegible]

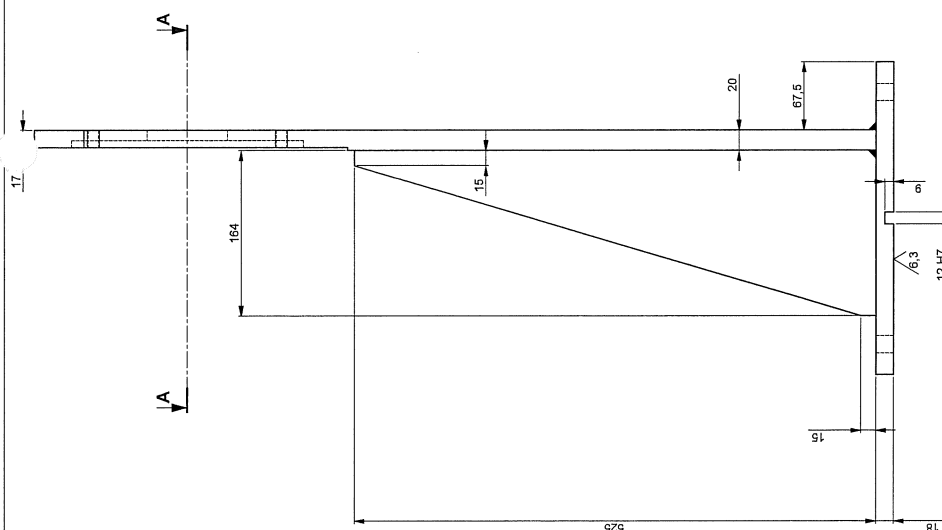

09/10

[illegible]

9, Rue de la Sublainerie - Tel : 02 47 53 68 00
37510 Bellan-Miré - Fax : 02 47 53 66 87
www.appli-net.fr

[illegible]