


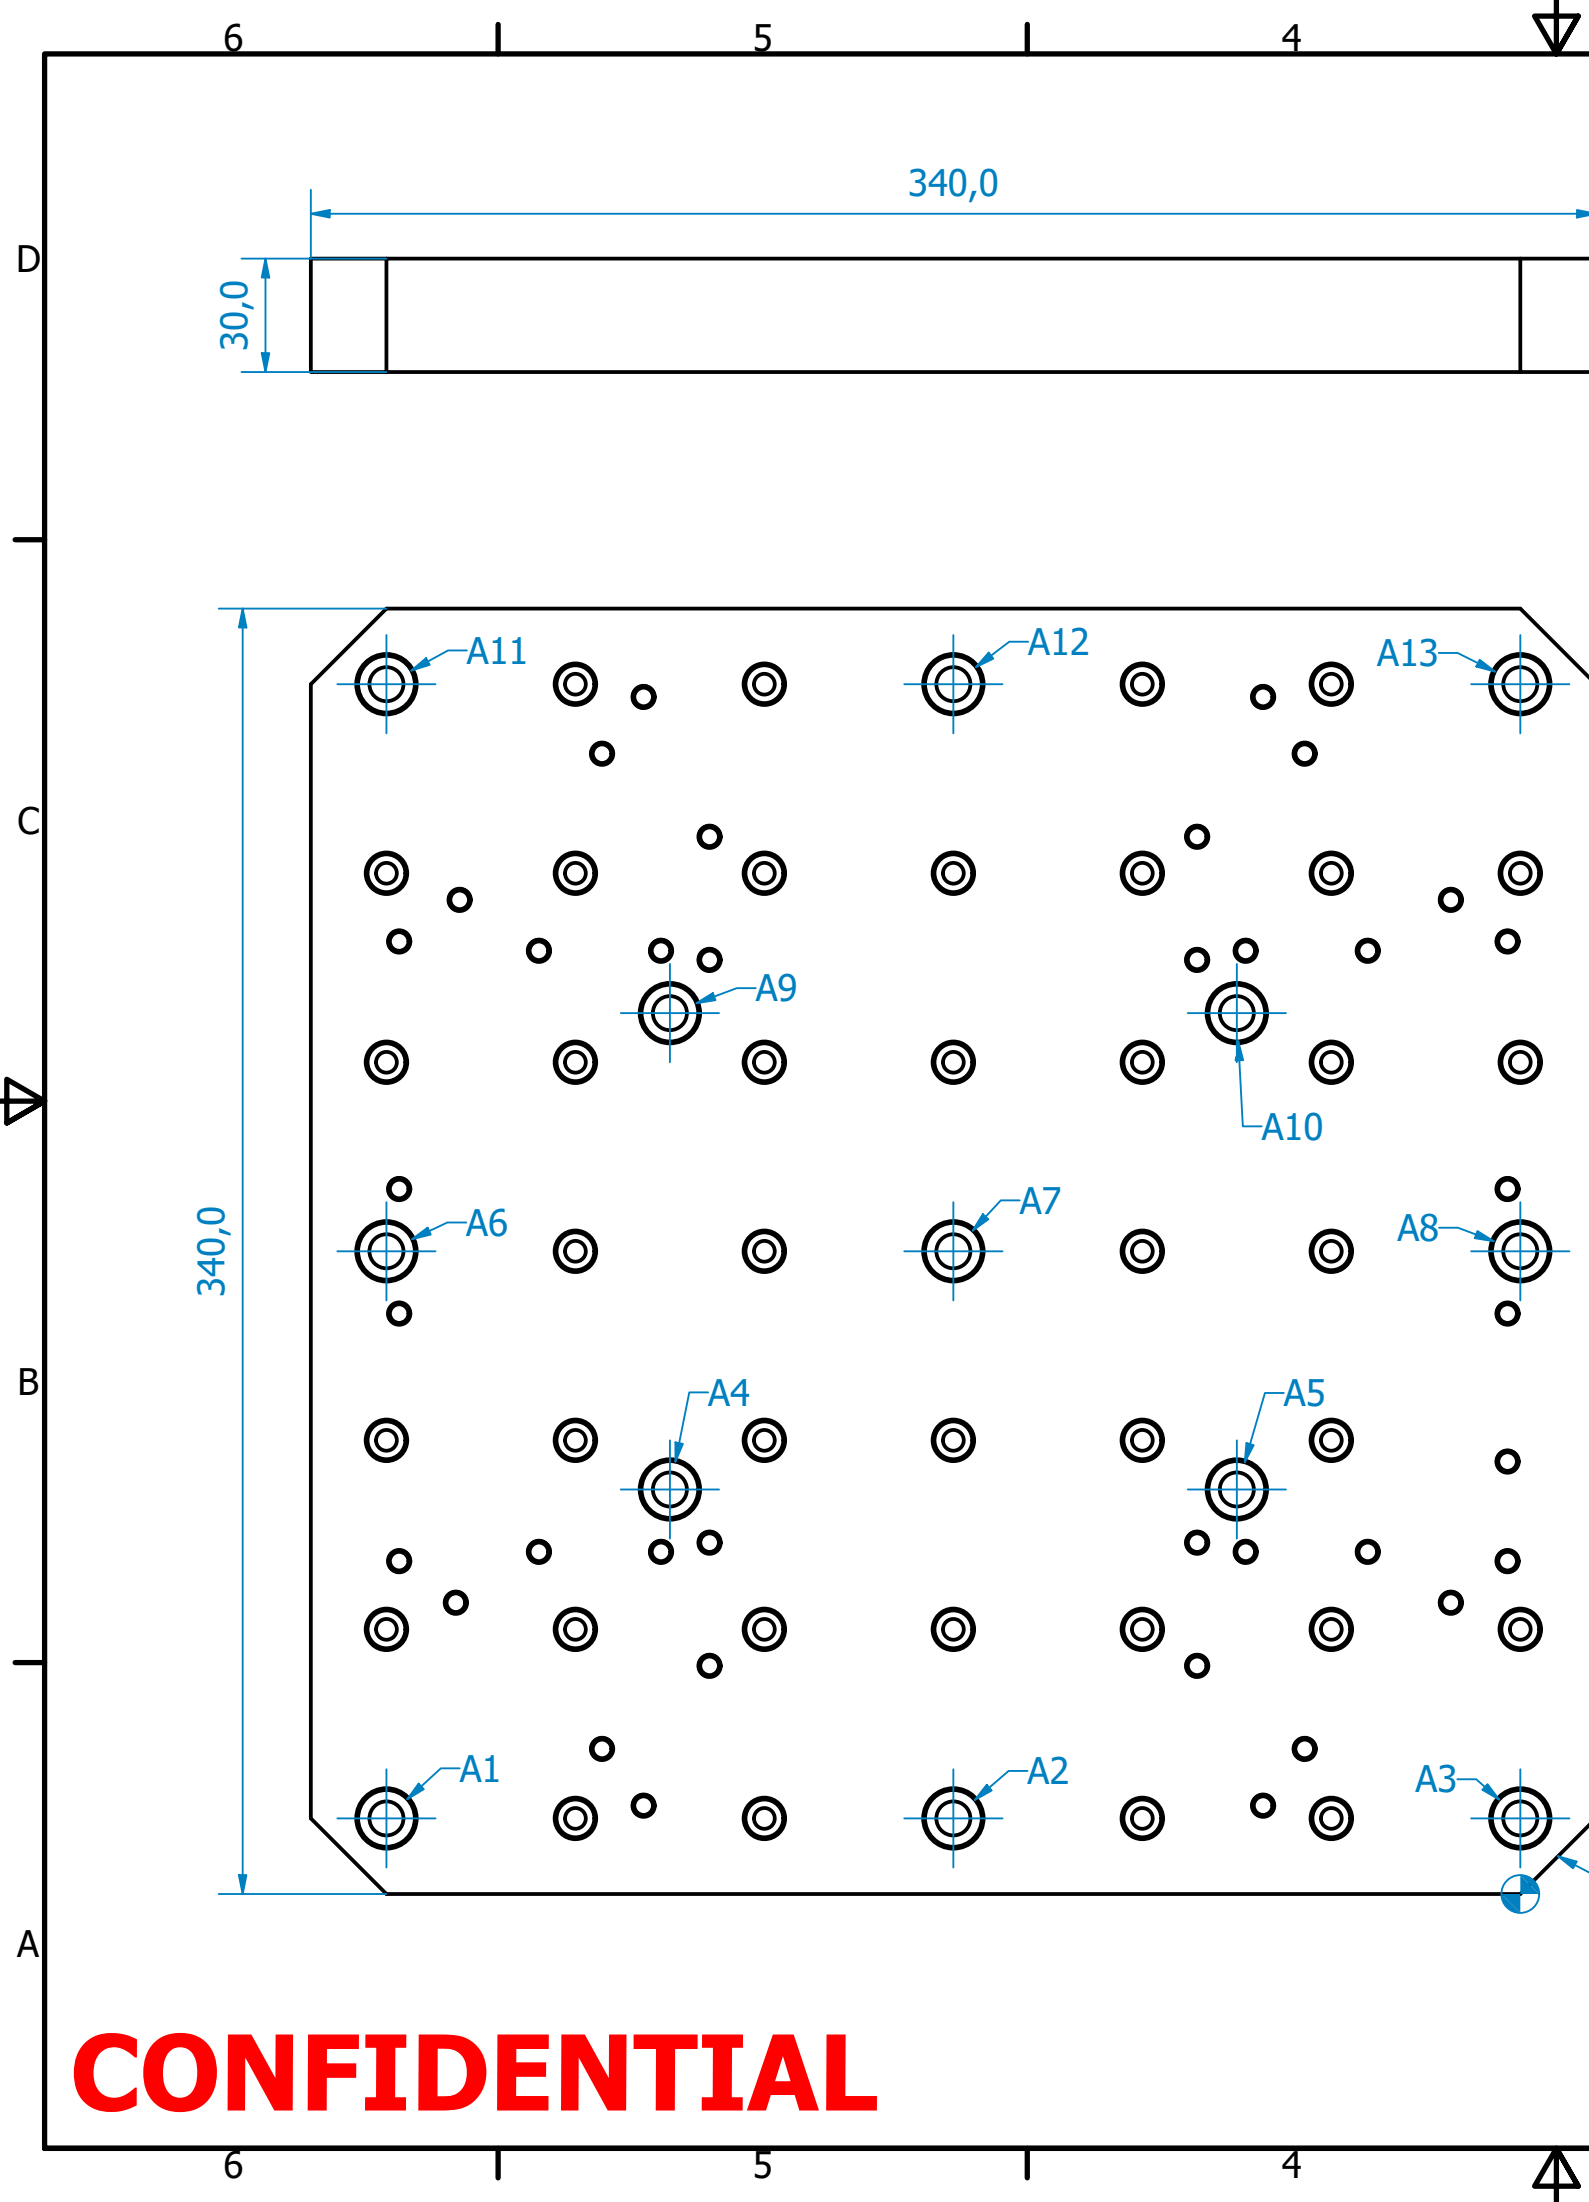


HOLE TABLE			
HOLE	XDIM	YDIM	DESCRIPTION
A1	-300,00	20,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A2	-150,00	20,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A3	0,00	20,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A4	-225,00	107,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A5	-75,00	107,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A6	-300,00	170,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A7	-150,00	170,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A8	0,00	170,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A9	-225,00	233,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A10	-75,00	233,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A11	-300,00	320,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A12	-150,00	320,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A13	0,00	320,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00

All threaded holes are with chamfer 0,5x45°
File sharp edges
If needed, please refer to Step file


CONFIDENTIAL

General Tolerances: ISO 2768 mK (except when specified) General Surface Roughness: Ra = 1.6 max (except when specified)		Drawing Author: elena.garombo Date: 7/9/2020	
All dimensions in mm	Scale 1 : 2		Material: Aluminum 7075 Treatment:
 AGILE SPACE		Part Number (Issue) CO-MEC-GSE-0001-01 (B)	Sheet format A3
		Plate	Page 1/3

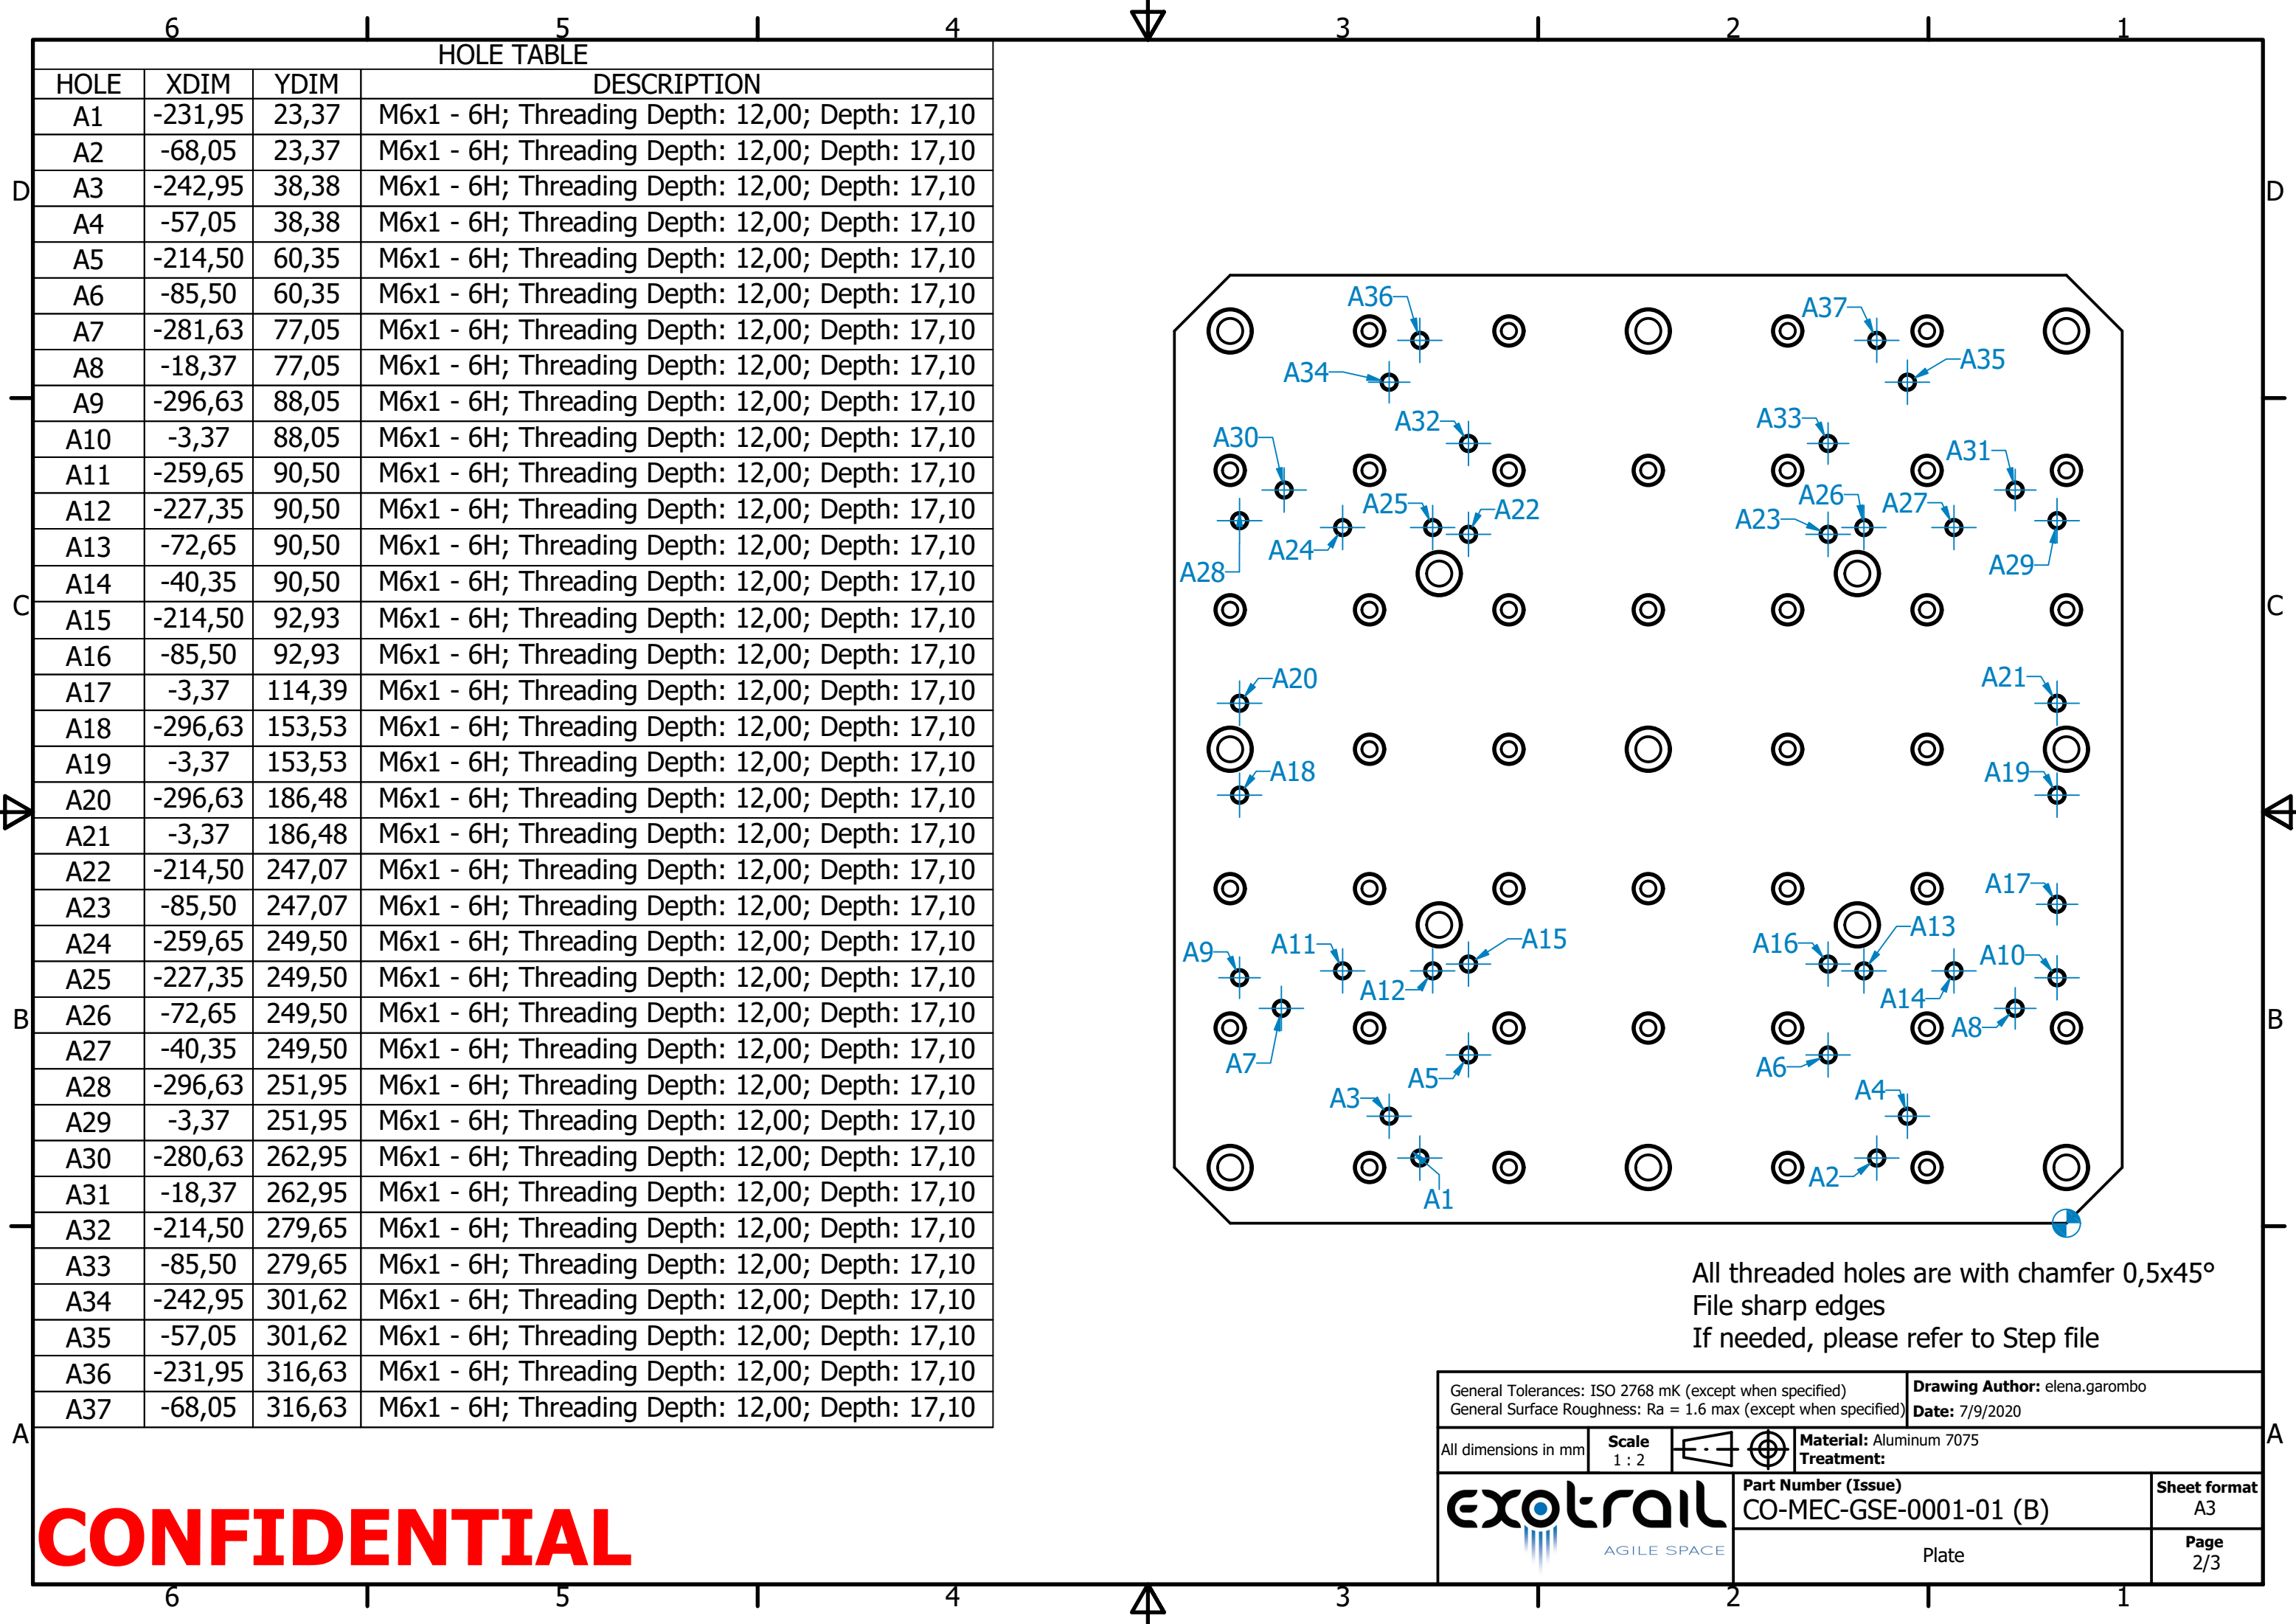

CONFIDENTIAL

General Tolerances: ISO 2768 mK (except when specified)		Drawing Author: elena.garombo	
General Surface Roughness: Ra = 1.6 max (except when specified)		Date: 7/9/2020	
All dimensions in mm	Scale 1 : 2		Material: Aluminum 7075 Treatment:
		Part Number (Issue) CO-MEC-GSE-0001-01 (B)	Sheet format A3
		Plate	Page 2/3

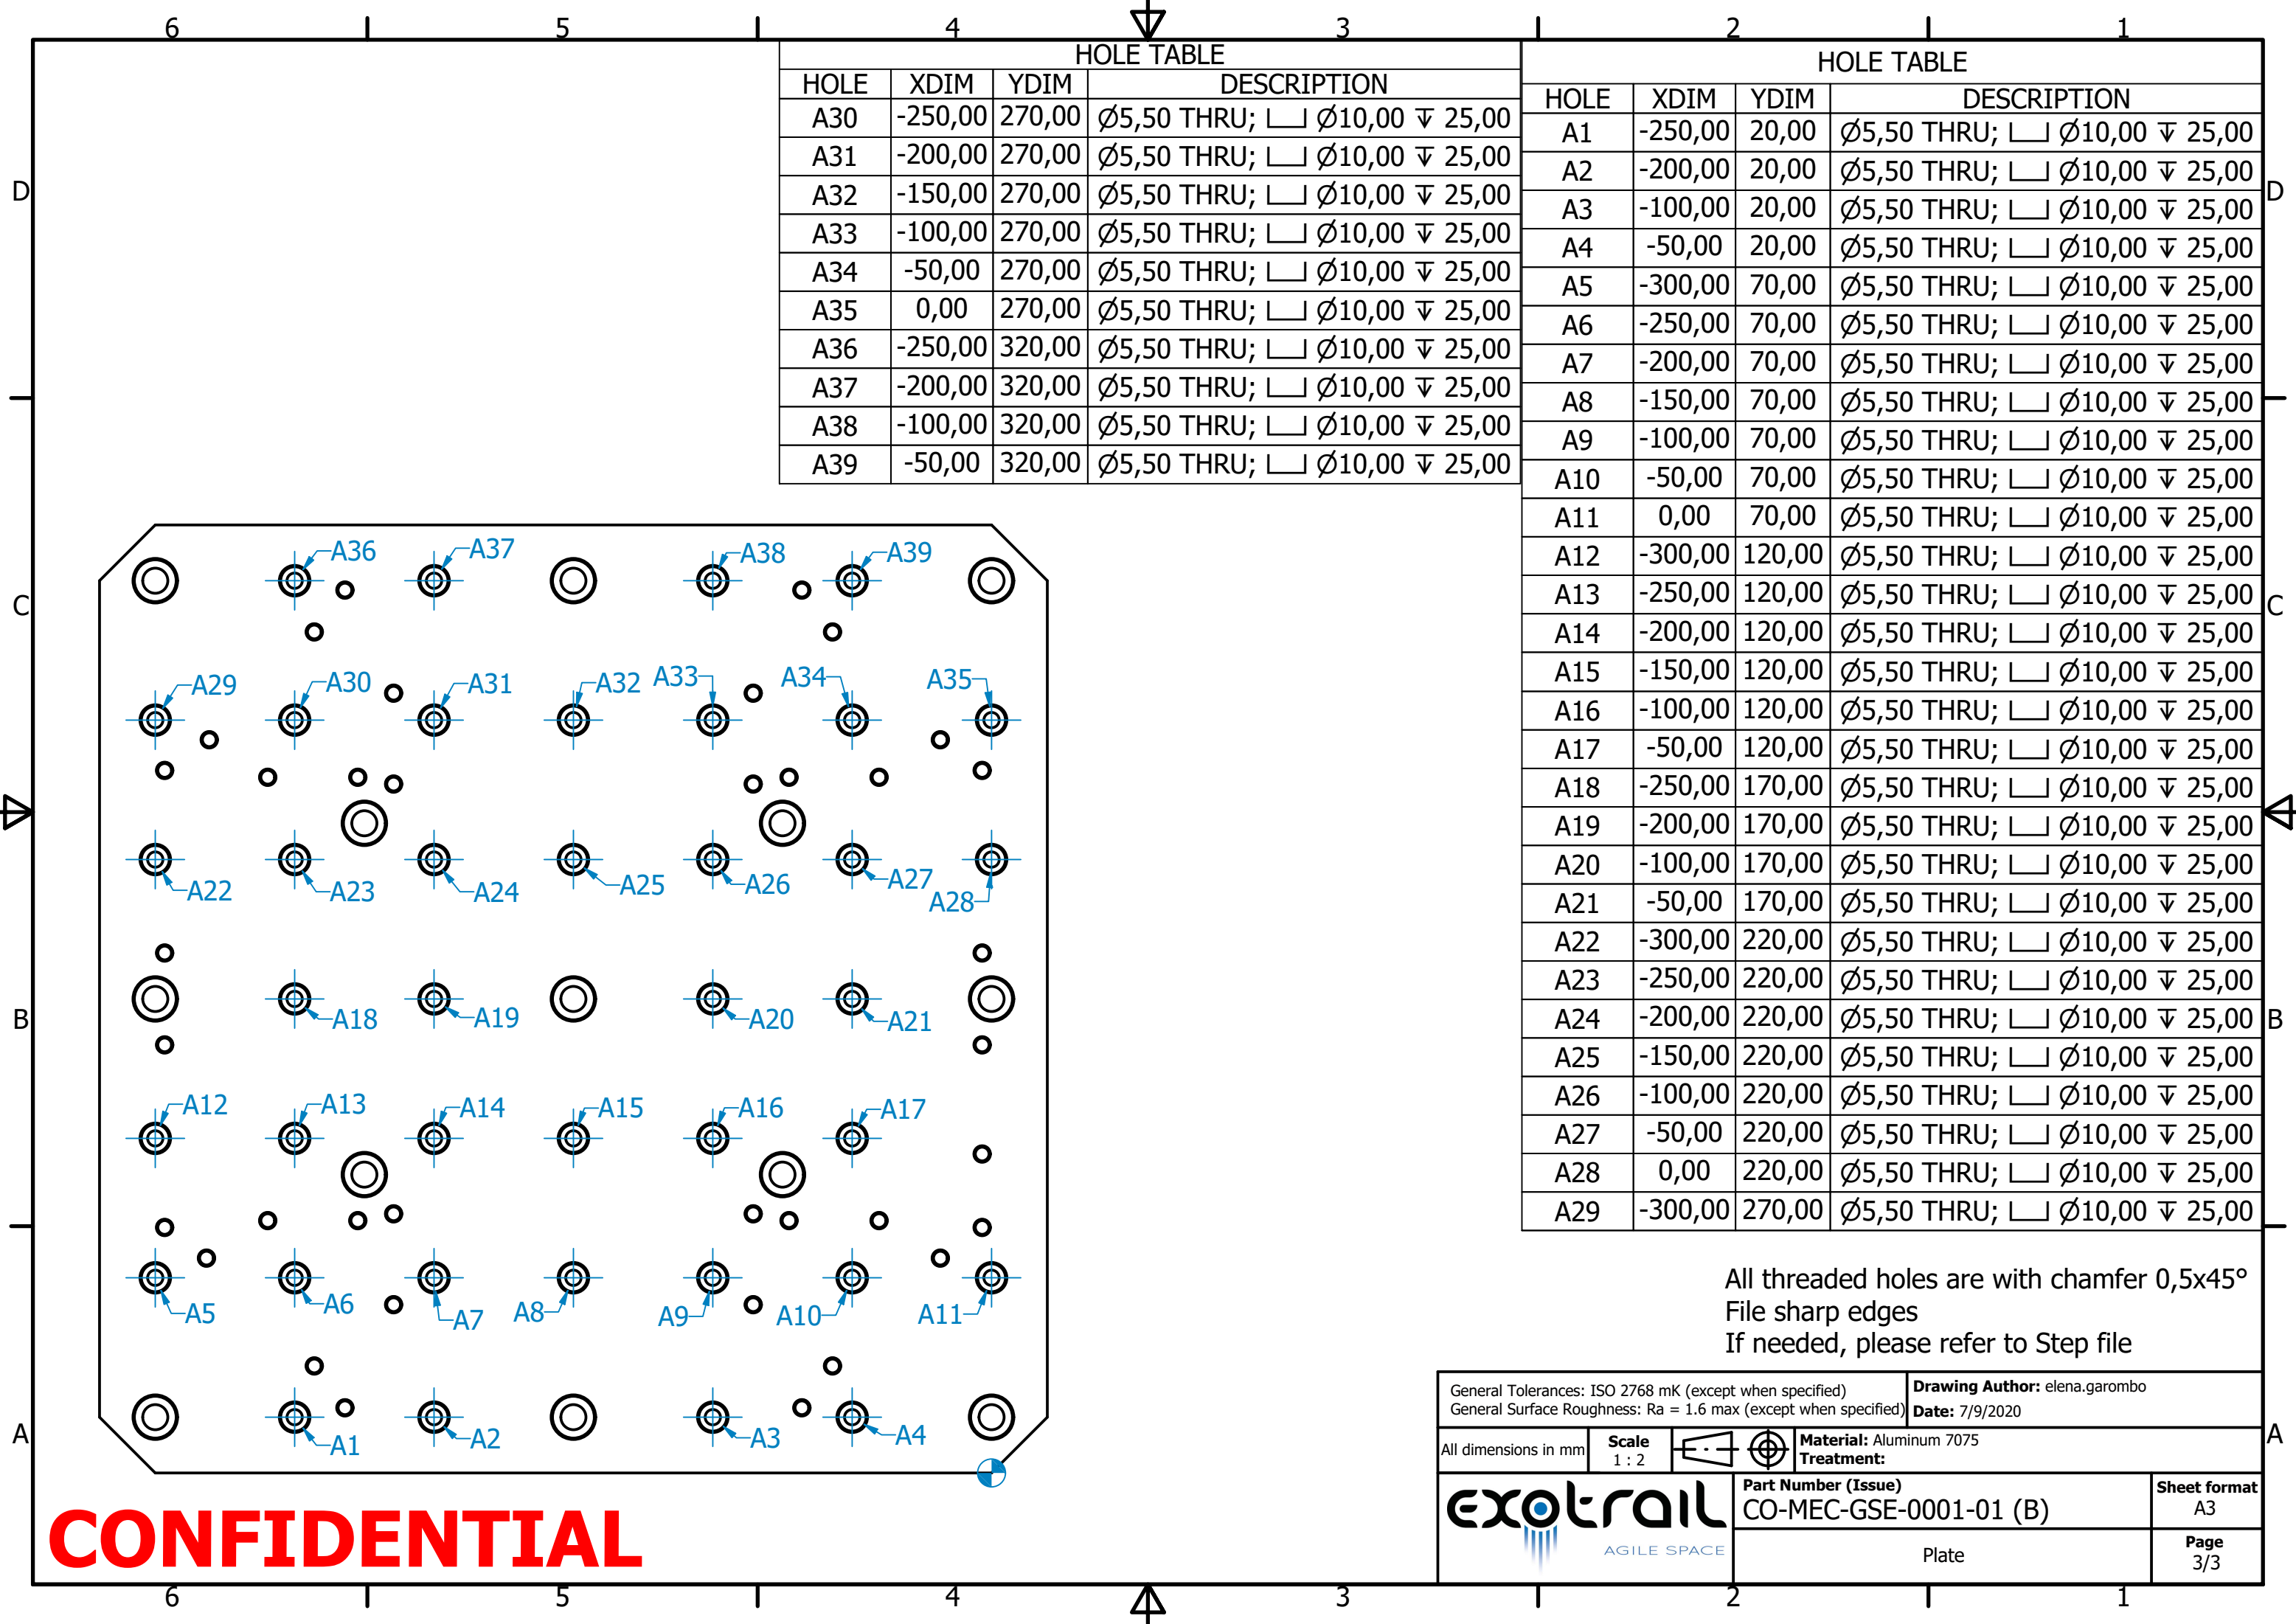

HOLE TABLE			
HOLE	XDIM	YDIM	DESCRIPTION
A30	-250,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A31	-200,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A32	-150,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A33	-100,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A34	-50,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A35	0,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A36	-250,00	320,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A37	-200,00	320,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A38	-100,00	320,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A39	-50,00	320,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00

HOLE TABLE			
HOLE	XDIM	YDIM	DESCRIPTION
A1	-250,00	20,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A2	-200,00	20,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A3	-100,00	20,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A4	-50,00	20,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A5	-300,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A6	-250,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A7	-200,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A8	-150,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A9	-100,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A10	-50,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A11	0,00	70,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A12	-300,00	120,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A13	-250,00	120,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A14	-200,00	120,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A15	-150,00	120,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A16	-100,00	120,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A17	-50,00	120,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A18	-250,00	170,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A19	-200,00	170,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A20	-100,00	170,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A21	-50,00	170,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A22	-300,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A23	-250,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A24	-200,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A25	-150,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A26	-100,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A27	-50,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A28	0,00	220,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00
A29	-300,00	270,00	Ø5,50 THRU; □ Ø10,00 ▽ 25,00

All threaded holes are with chamfer 0,5x45°
File sharp edges
If needed, please refer to Step file

General Tolerances: ISO 2768 mK (except when specified)
General Surface Roughness: Ra = 1.6 max (except when specified)

Drawing Author: elena.garombo
Date: 7/9/2020

All dimensions in mm

Scale 1 : 2

Material: Aluminum 7075
Treatment:

AGILE SPACE

Part Number (Issue)
CO-MEC-GSE-0001-01 (B)

Sheet format
A3

Plate

Page
3/3

CONFIDENTIAL