




HOLE TABLE			
HOLE	XDIM	YDIM	DESCRIPTION
A1	-300,00	20,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A2	-150,00	20,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A3	0,00	20,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A4	-225,00	107,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A5	-75,00	107,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A6	-300,00	170,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A7	-150,00	170,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A8	0,00	170,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A9	-225,00	233,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A10	-75,00	233,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A11	-300,00	320,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A12	-150,00	320,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00
A13	0,00	320,00	Ø9,00 THRU; □ Ø15,00 ▽ 21,00

All threaded holes are with chamfer 0,5x45°
File sharp edges
If needed, please refer to Step file

General Tolerances: ISO 2768 mK (except when specified) General Surface Roughness: Ra = 1.6 max (except when specified)		Drawing Author: elena.garombo Date: 7/9/2020	
All dimensions in mm	Scale 1 : 2		Material: Aluminum 7075 Treatment:
AGILE SPACE		Part Number (Issue) CO-MEC-GSE-0001-01 (A)	Sheet format A3
		Plate	Page 1/2

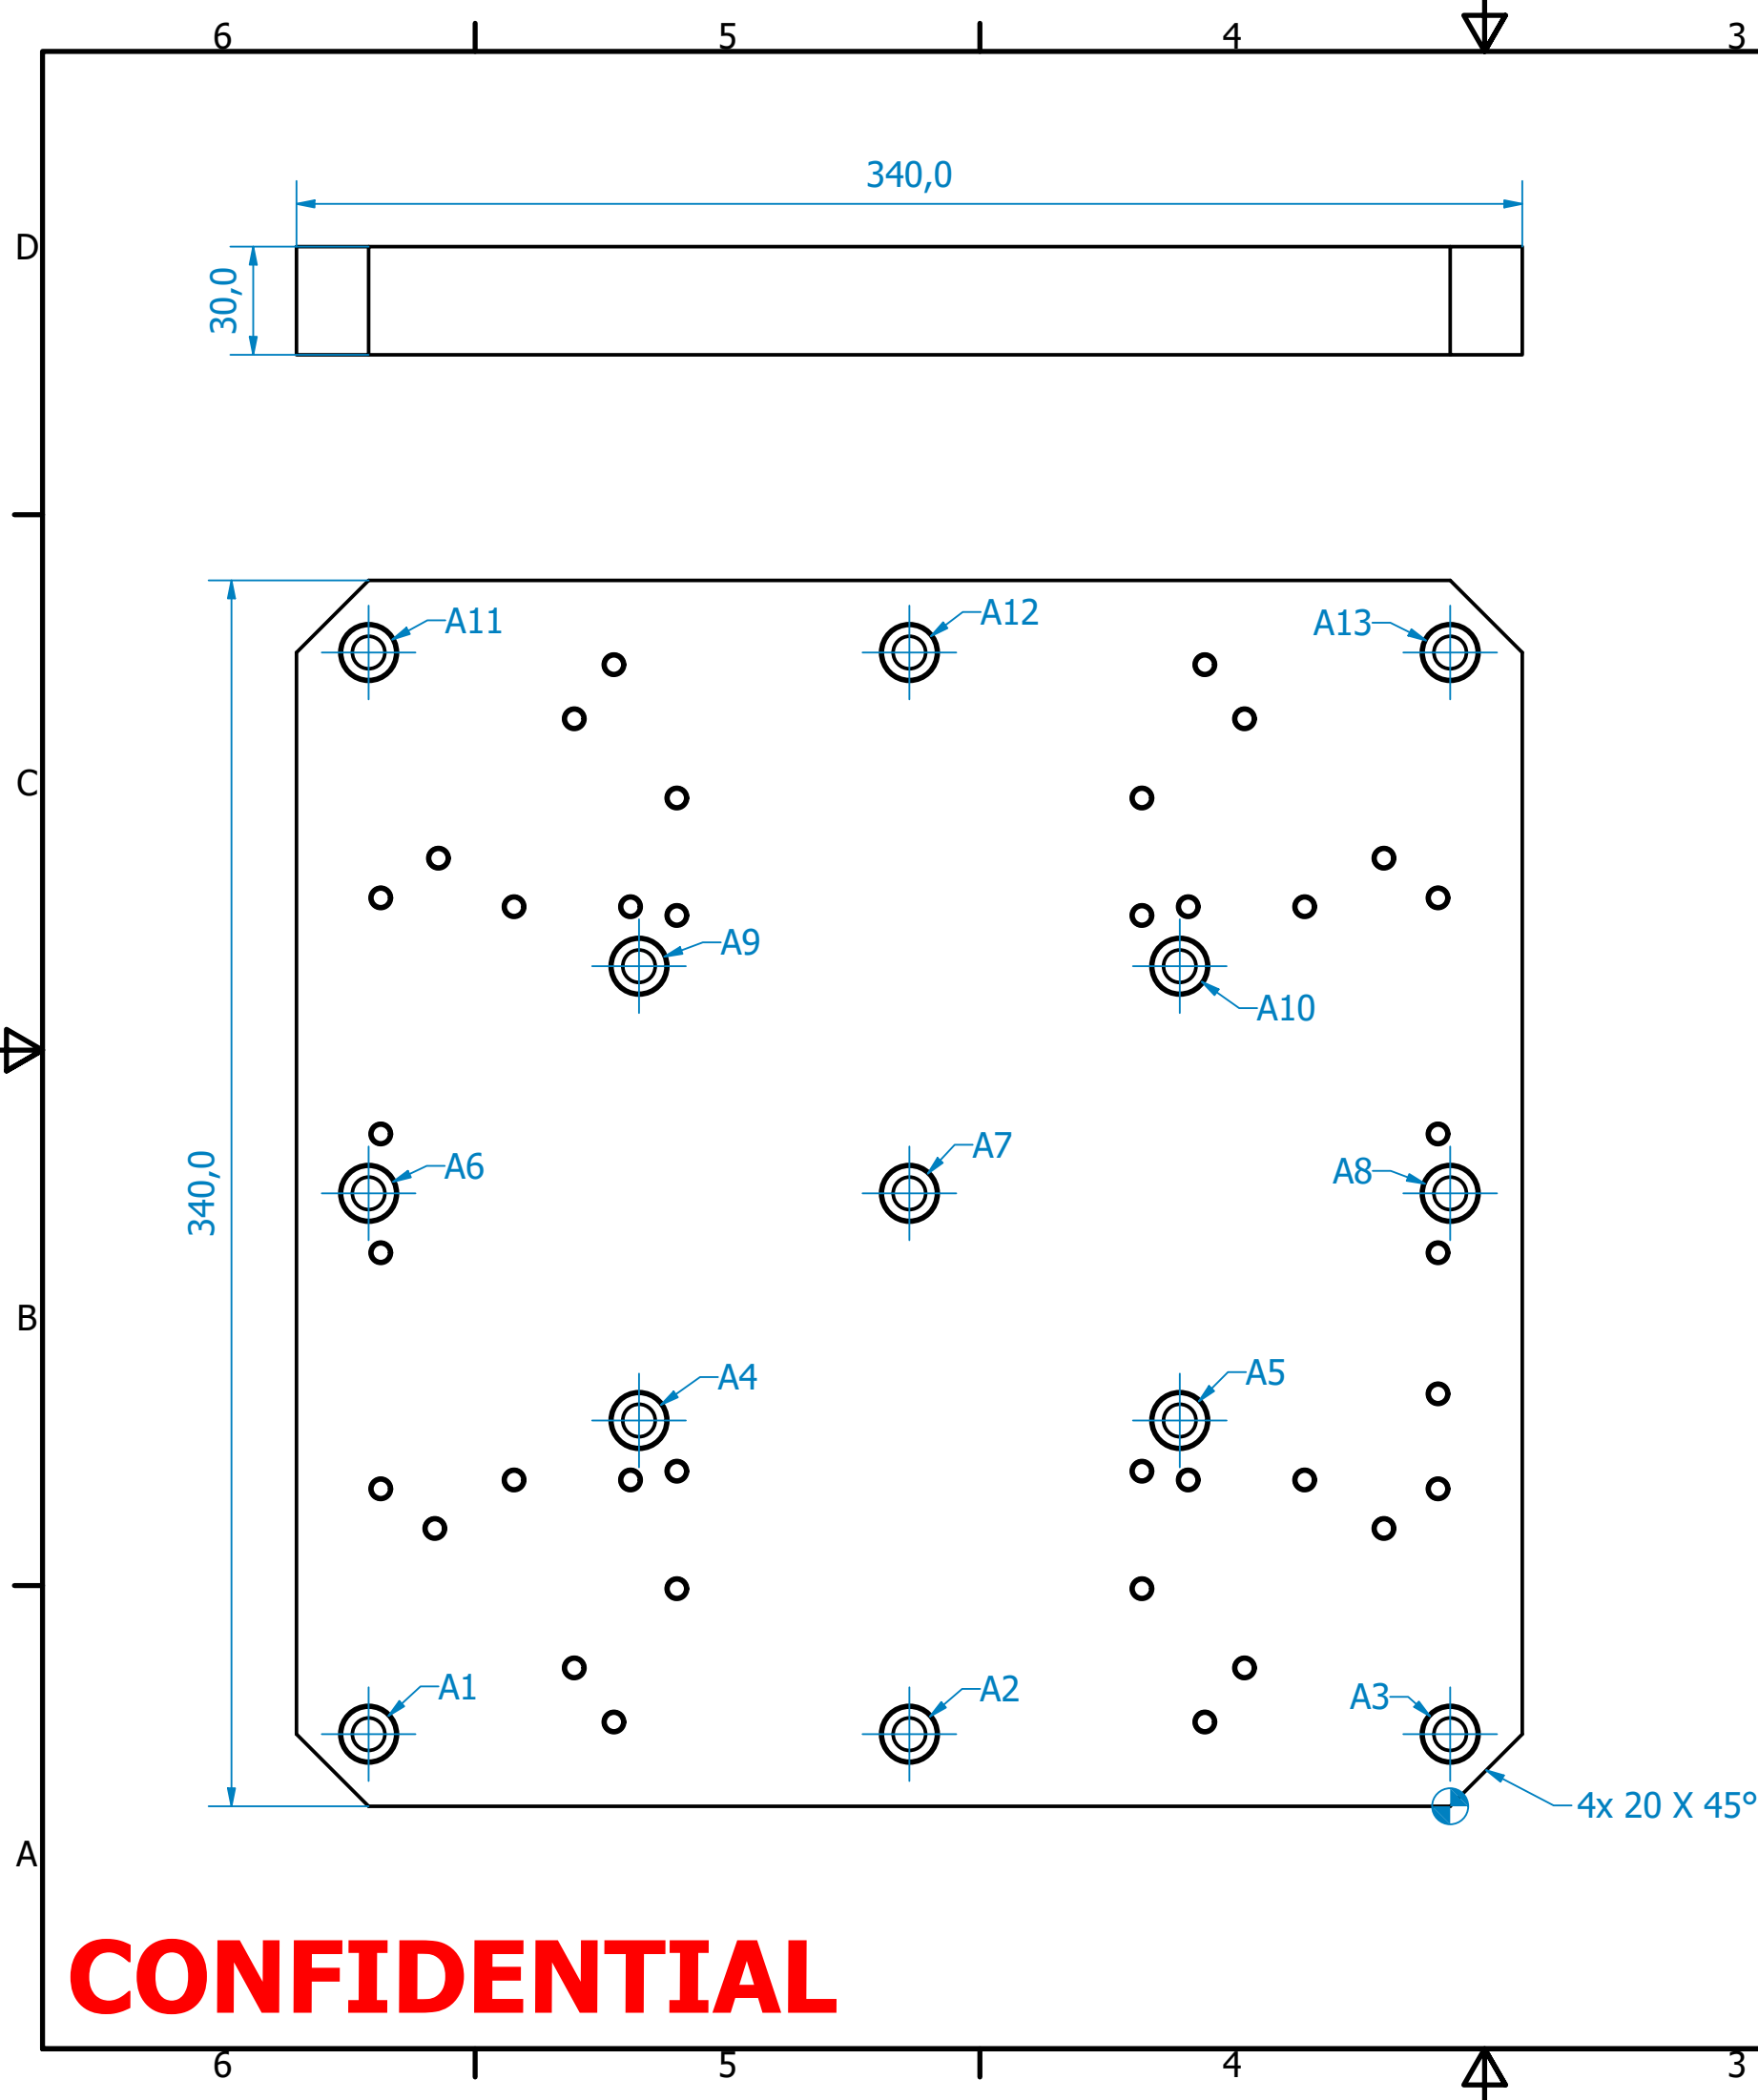