
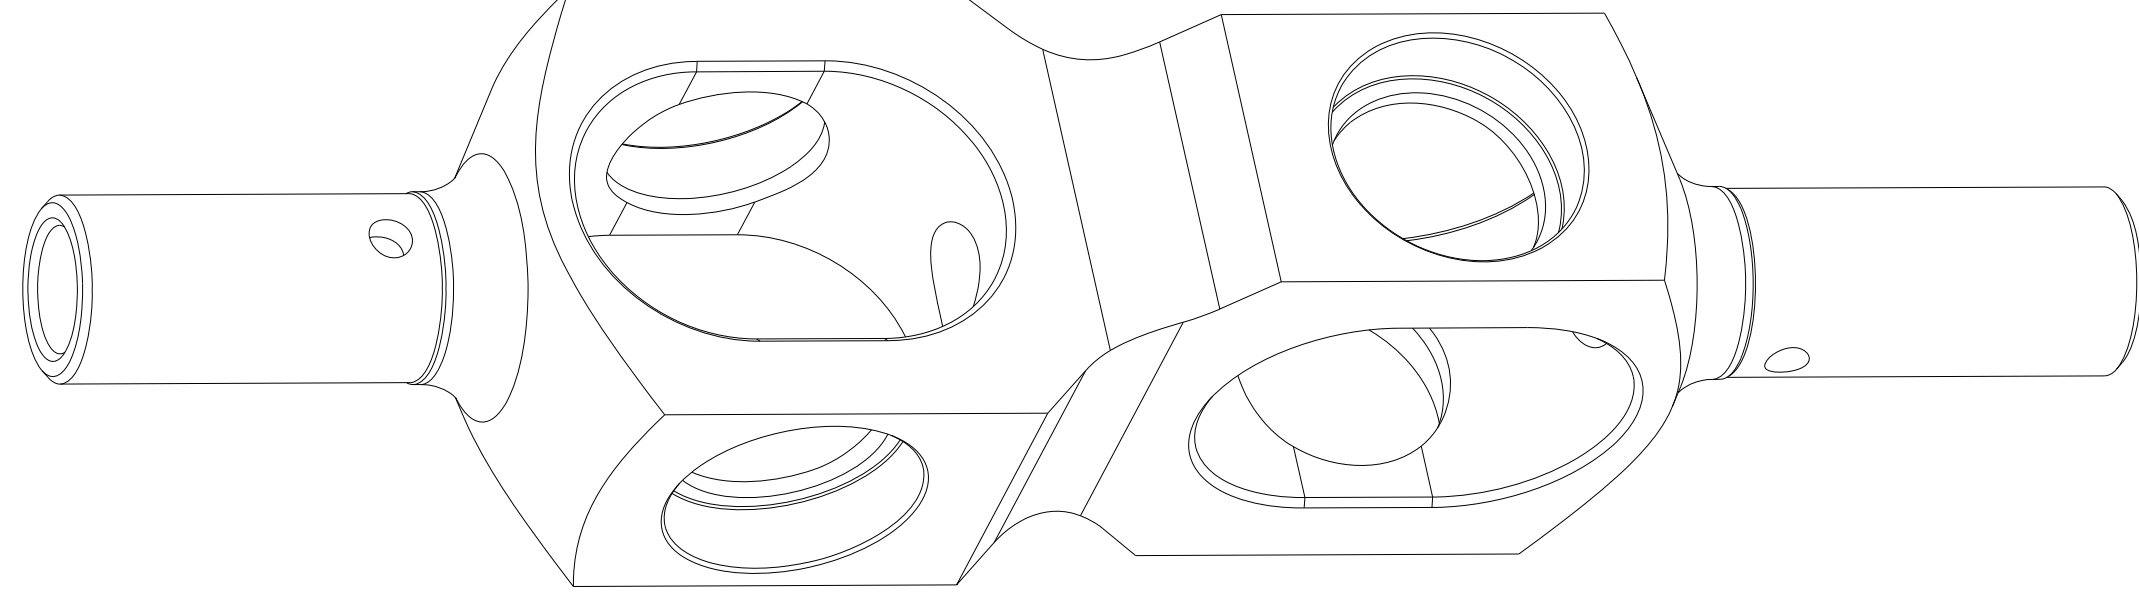
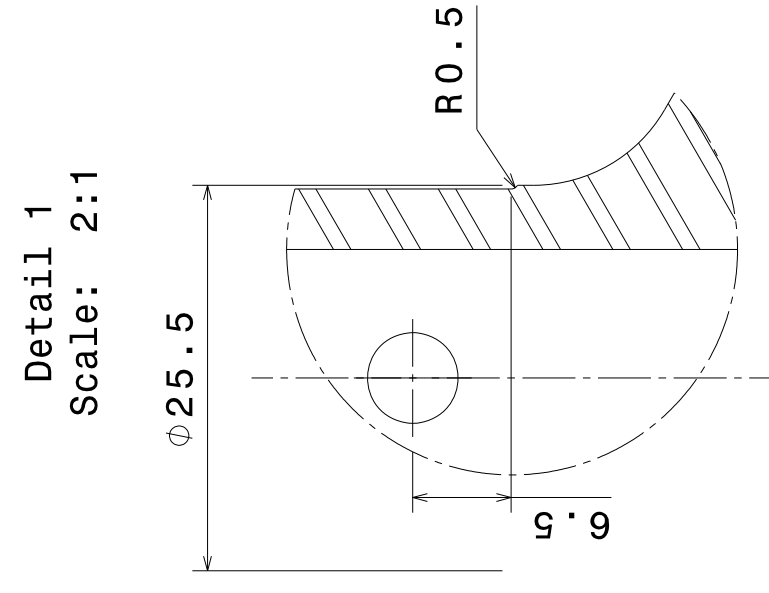
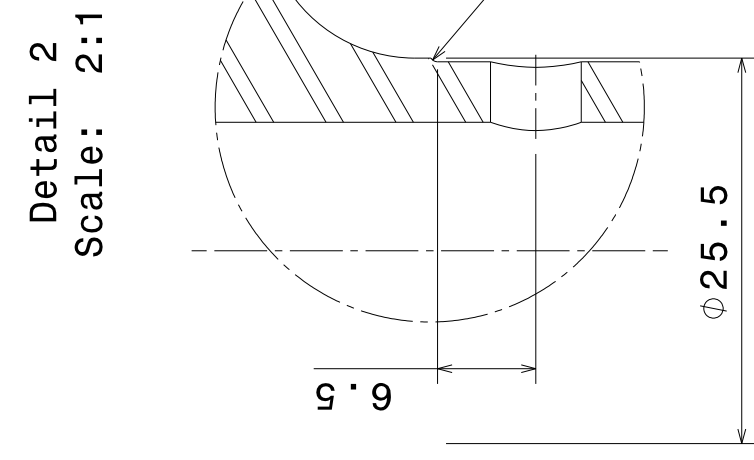
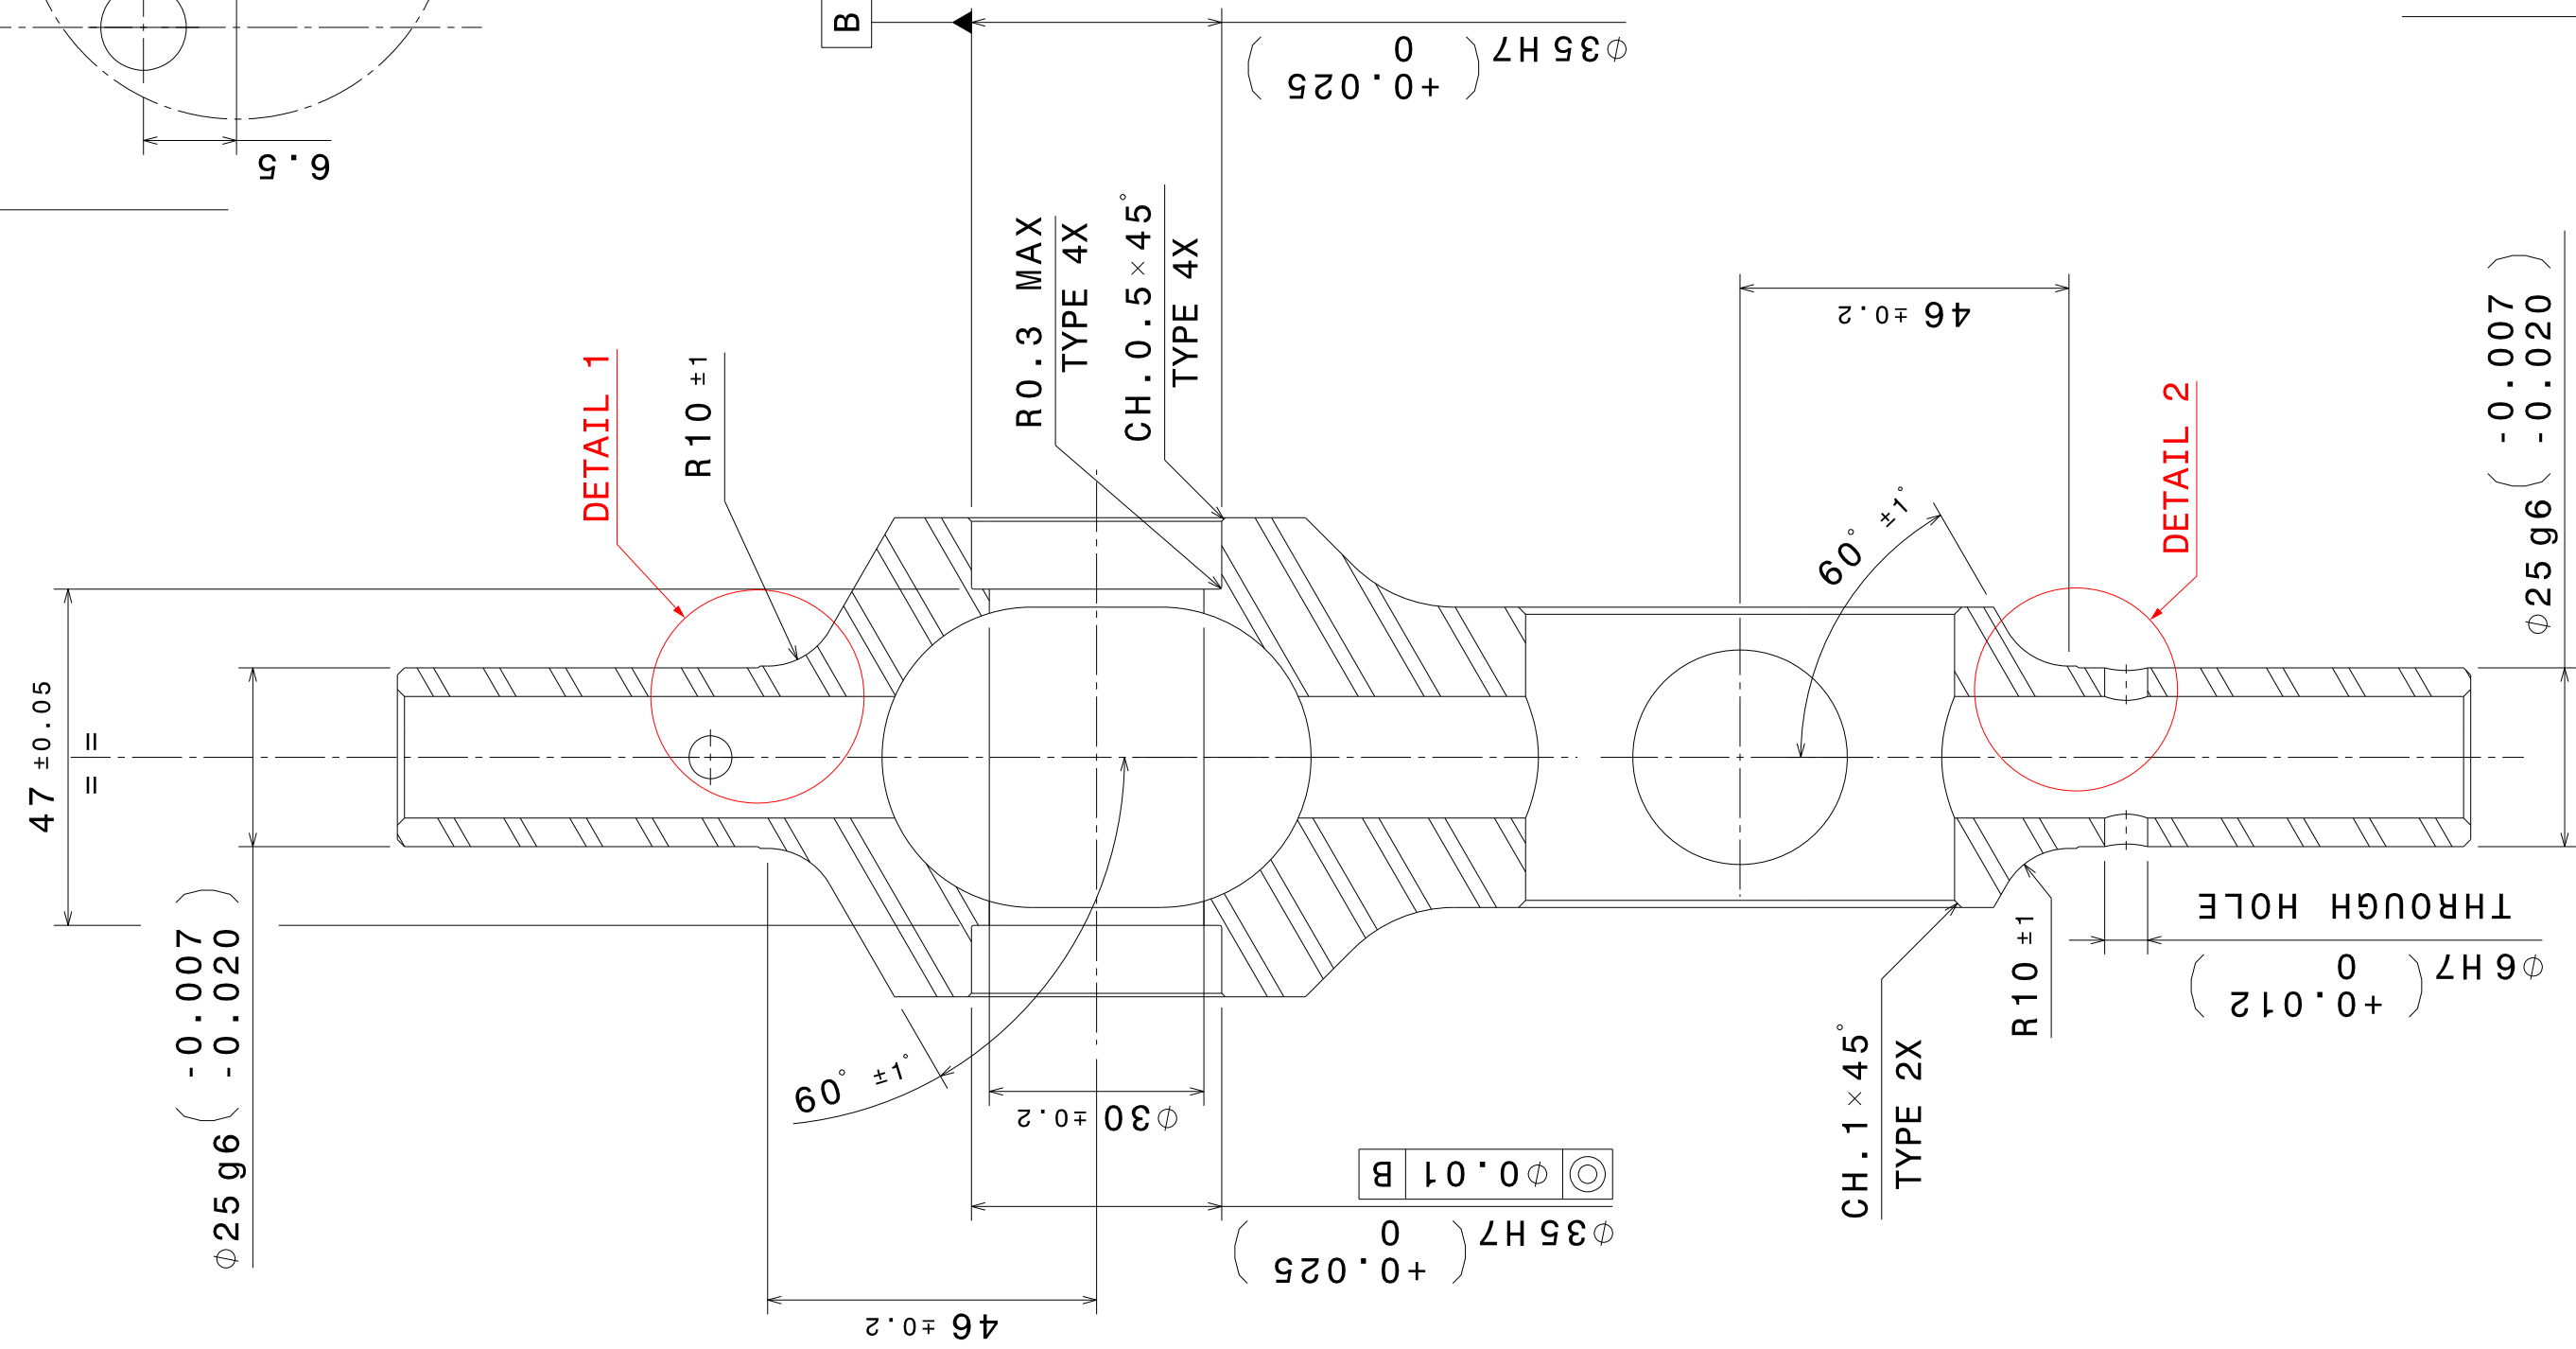
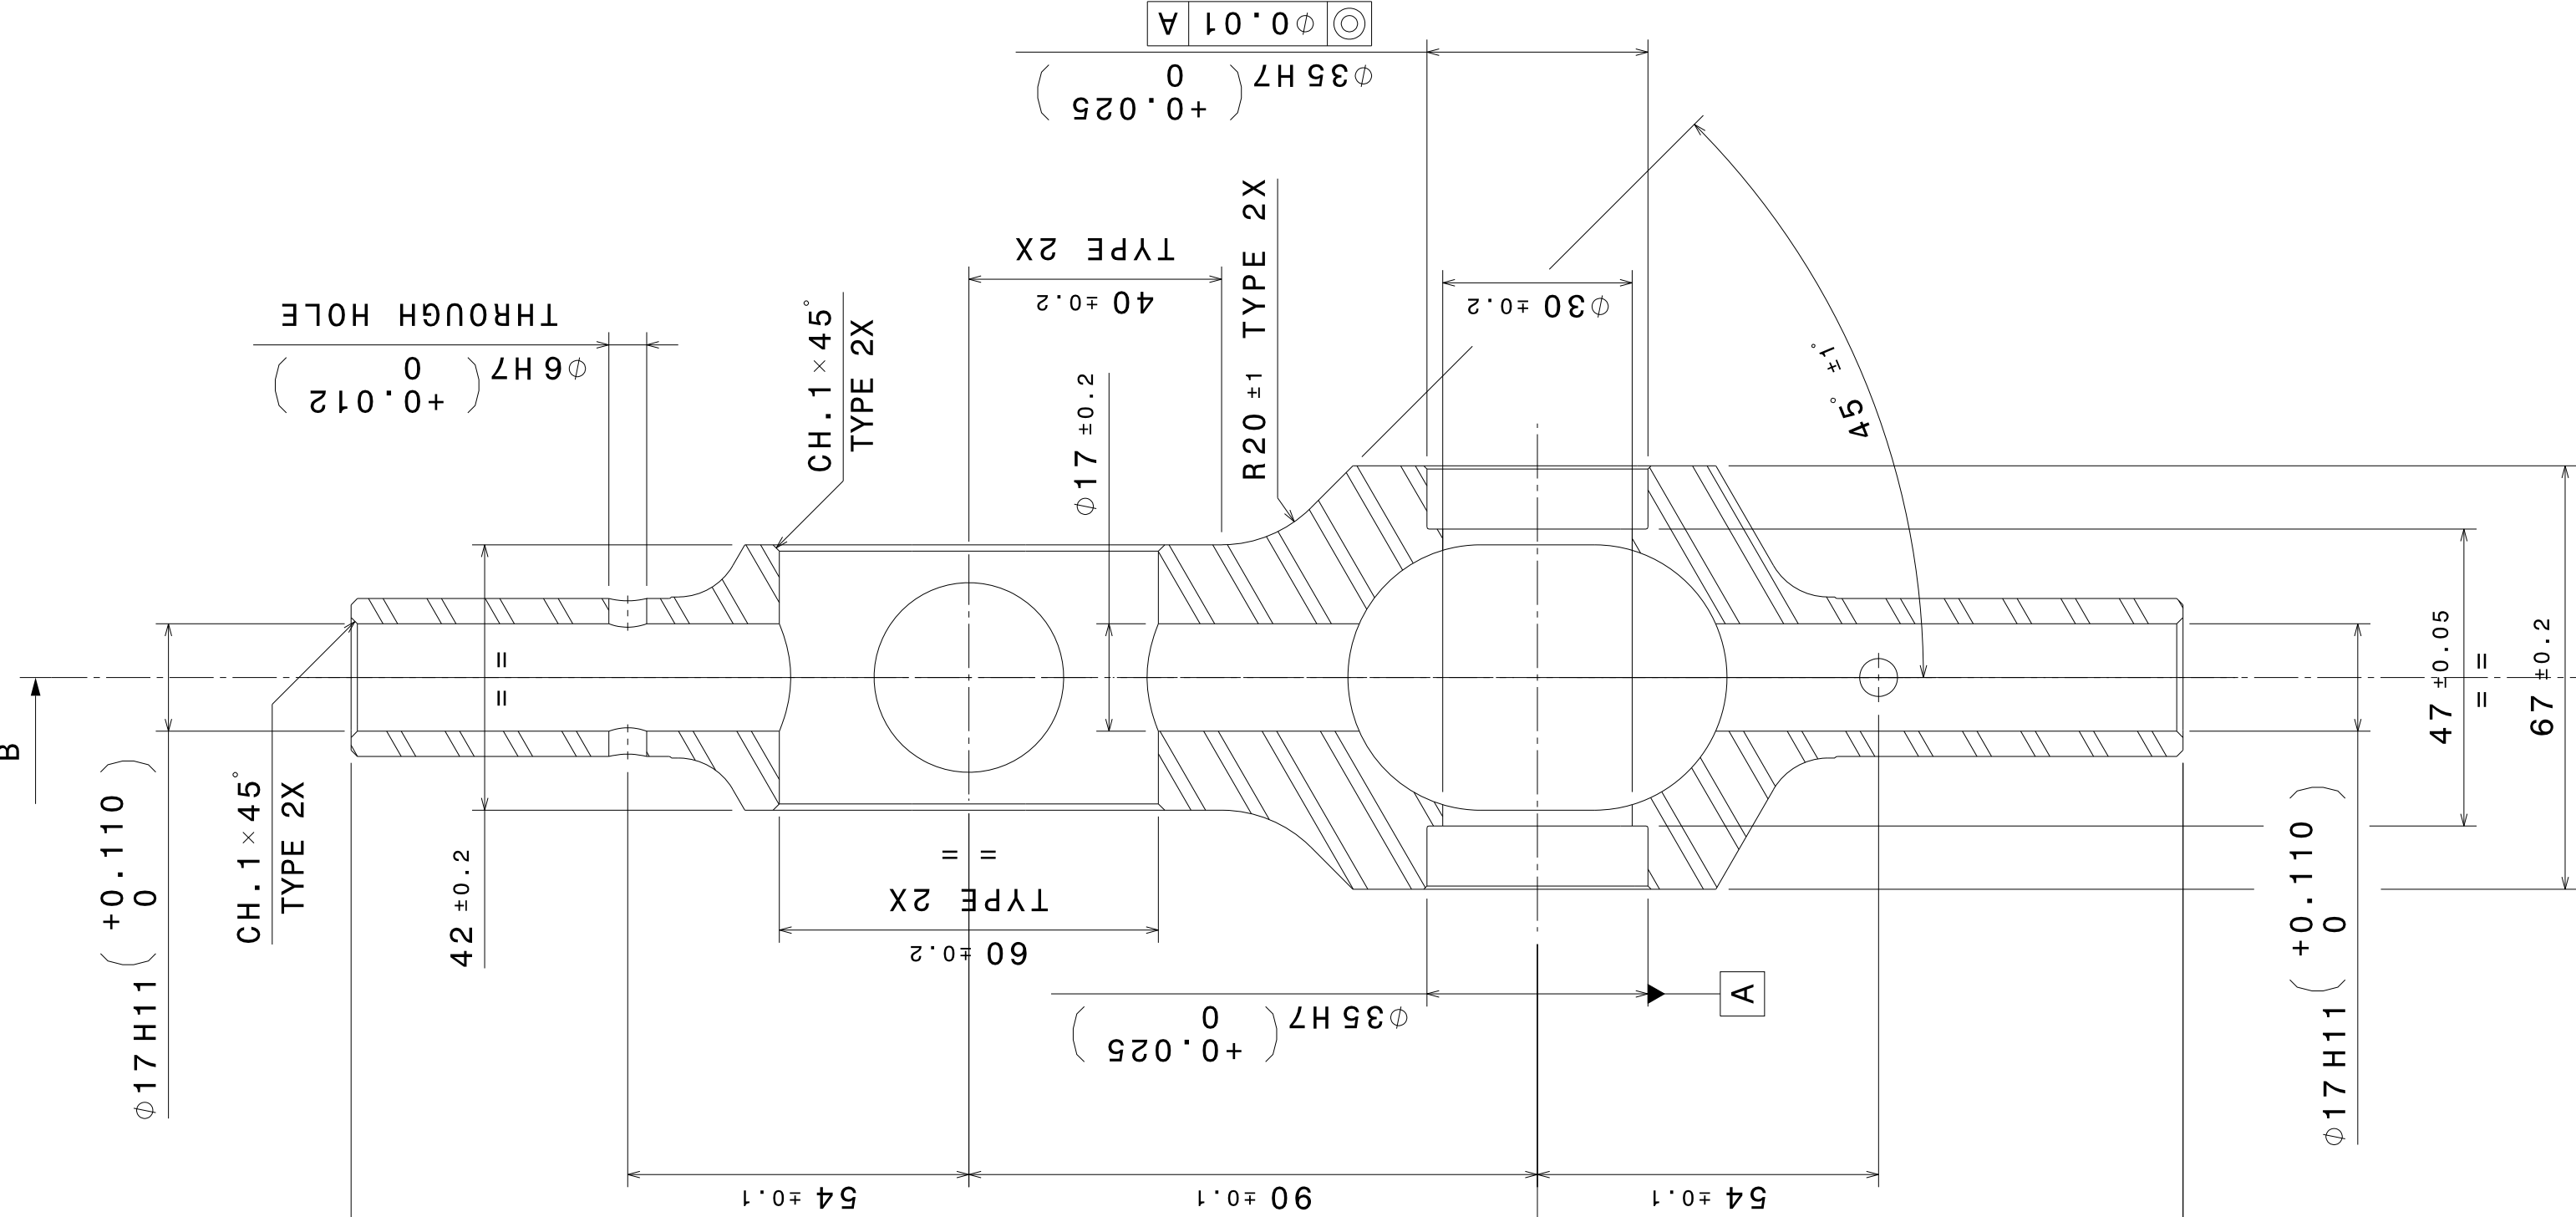
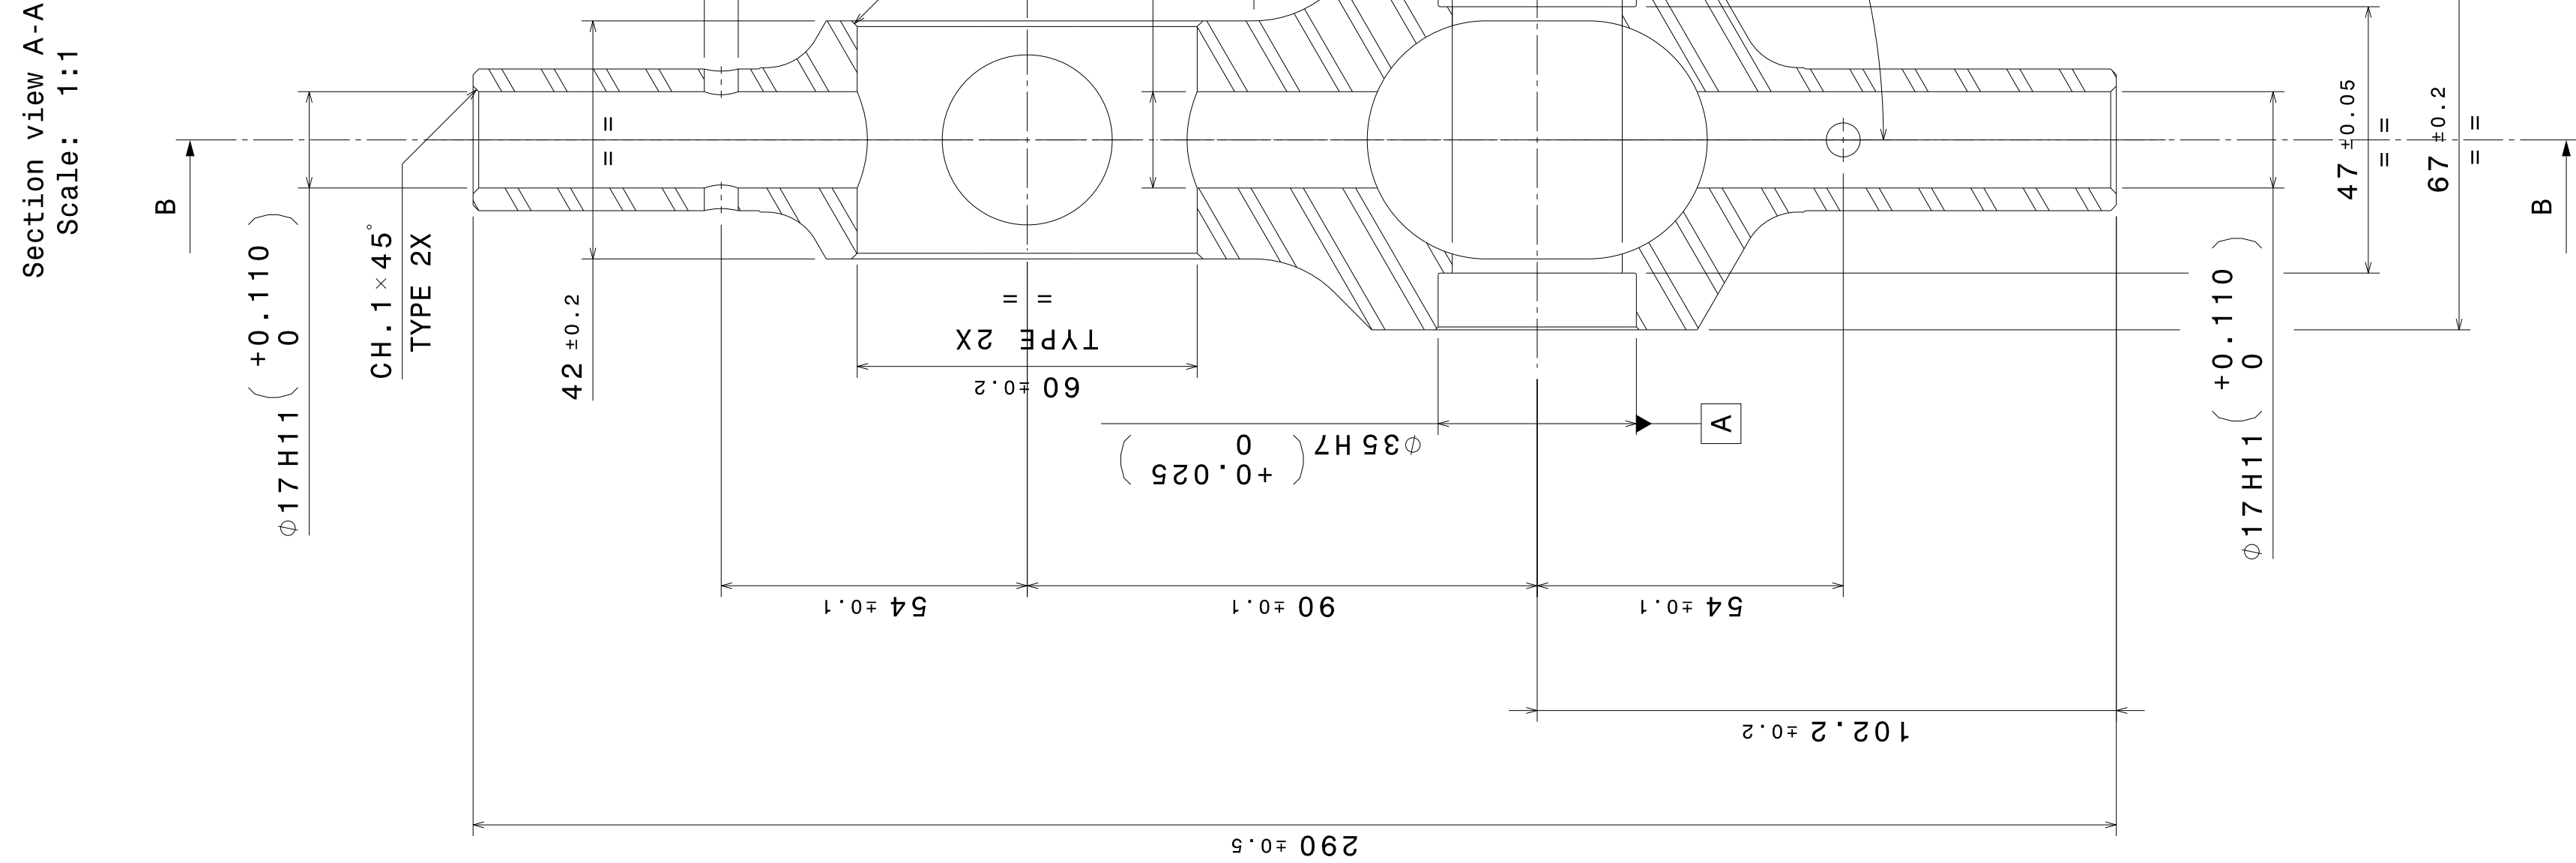
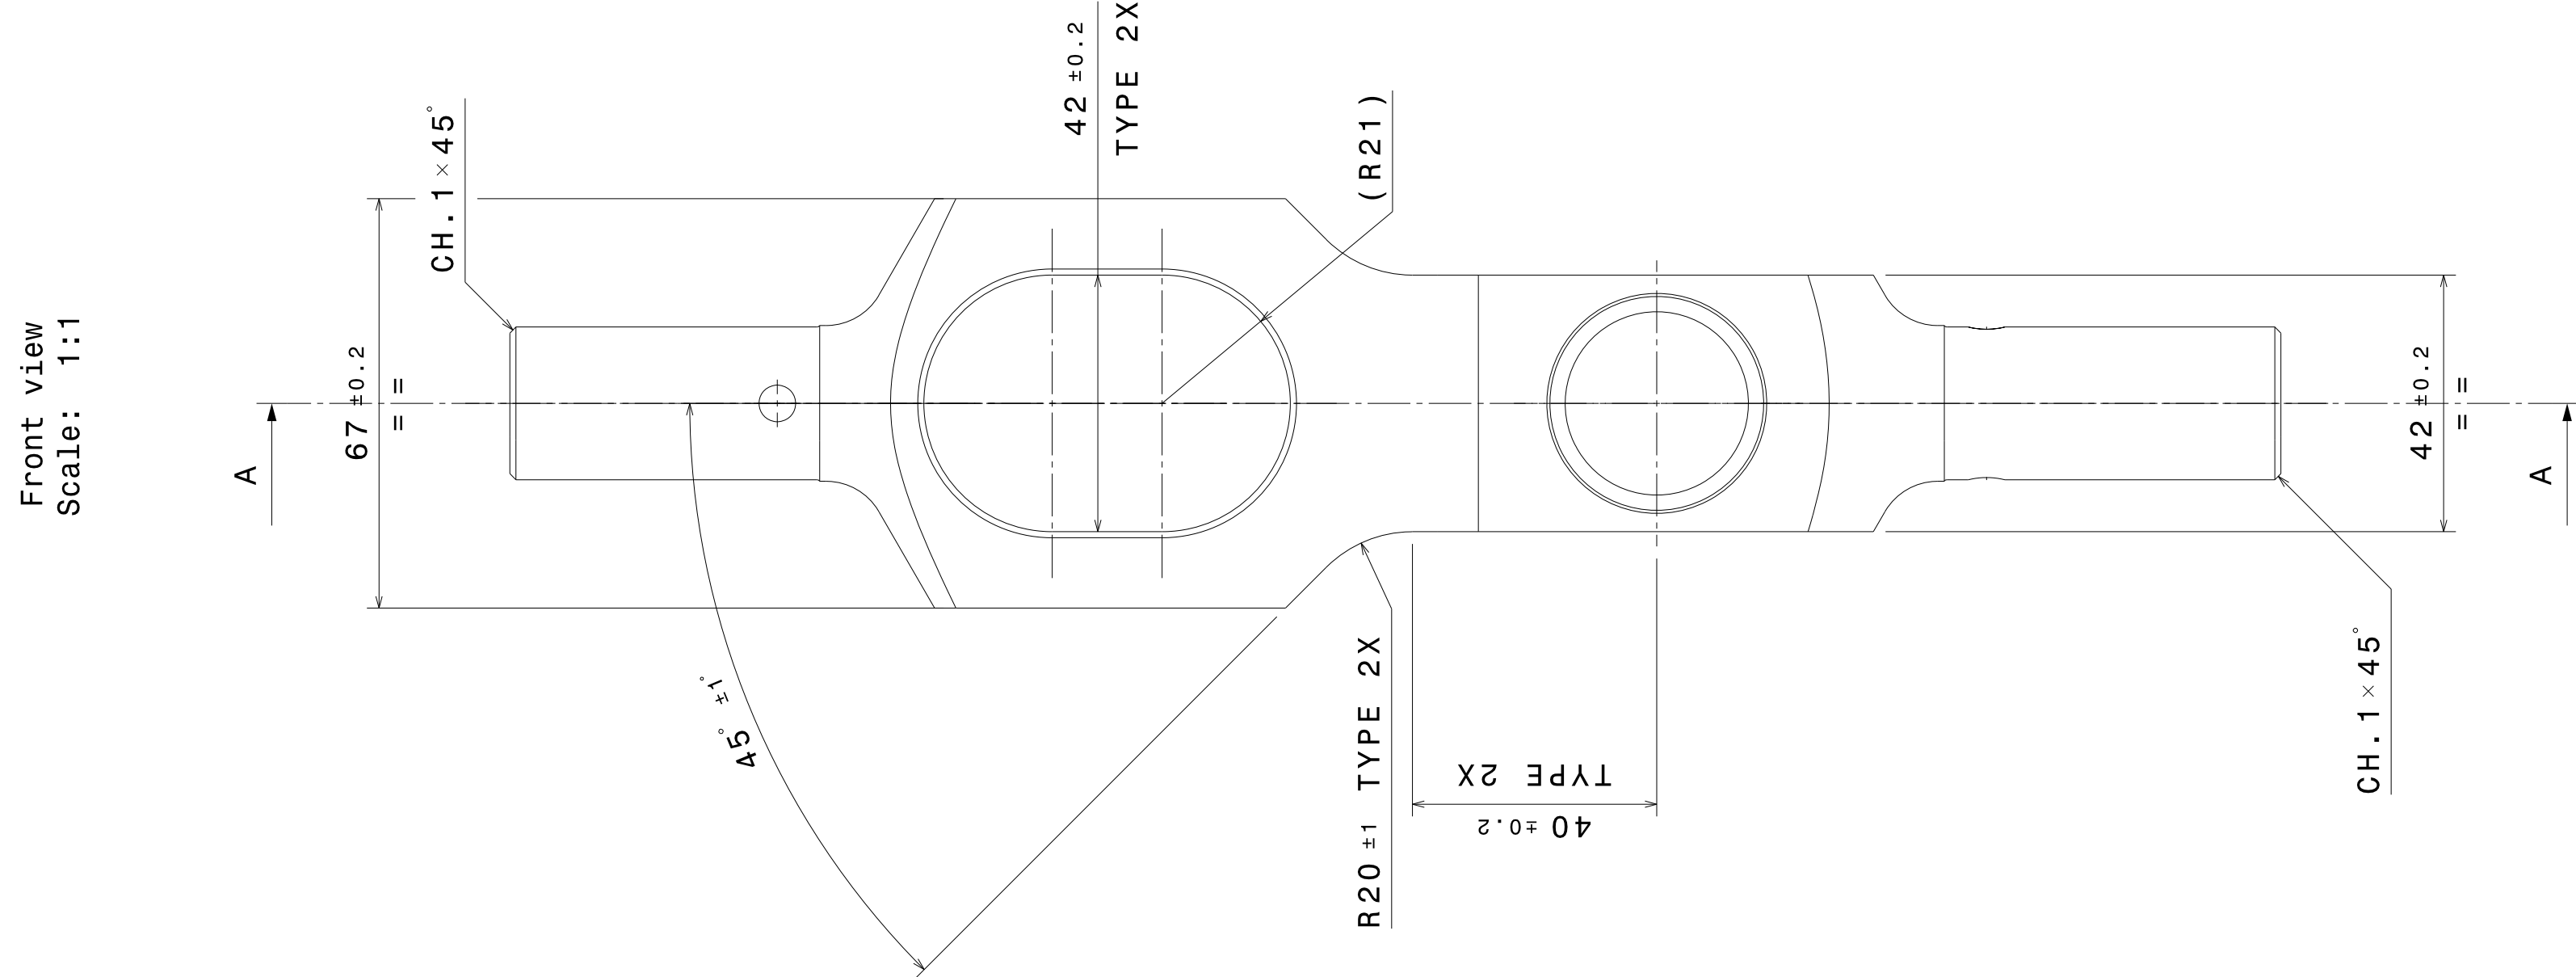






































































ISSUE	A	NEW DRAWING	19/10/19	SEQUERA D.
IND.		MODIFICATIONS	DATE	APPROVED BY
REVISION HISTORY				
DOC STATUS:	IN WORK	GENERAL TOLERANCES: ISO 2768-mK	ISO 3715	
DESIGNED BY:	SEQUERA D.	UNLESS OTHERWISE SPECIFIED		
DATE:	19/10/2019			
CHECKED BY:	SEQUERA D.			
DATE:	...			
APPROVED BY:	SEQUERA D.			
DATE:	...			
DRAWING NUMBER		EOLX1.1-D-110-005		
SHEET		1/1		
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				

NOTA	
1	BREAK SHARP EDGES R OR CH. 0.1 TO 0.4
2	COLORLESS SULFURIC ANODIC OXYDATION ALL THE PART