


gear manufacturing request



$D2 = 19 \text{ mm} + 0,05 - 0,0$		$D3 = 34,5 \text{ mm}$	$B = 8,30 \text{ mm}$	$L = 20,10 \text{ mm}$
steel material C45E / 1.1191				
<i>One gear T=</i>	33	$D = 43,75 \text{ mm}$	$D1 = 41,25 \text{ mm}$	$D4 = 38,13 \text{ mm}$
<i>One gear T=</i>	36	$D = 47,50 \text{ mm}$	$D1 = 45,00 \text{ mm}$	$D4 = 41,88 \text{ mm}$
<i>Two gear T=</i>	40	$D = 52,50 \text{ mm}$	$D1 = 50,00 \text{ mm}$	$D4 = 46,88 \text{ mm}$
<i>One gear T=</i>	42	$D = 55,00 \text{ mm}$	$D1 = 52,50 \text{ mm}$	$D4 = 49,38 \text{ mm}$
<i>One gear T=</i>	44	$D = 57,50 \text{ mm}$	$D1 = 55,00 \text{ mm}$	$D4 = 51,88 \text{ mm}$
<i>One gear T=</i>	45	$D = 58,75 \text{ mm}$	$D1 = 56,25 \text{ mm}$	$D4 = 53,13 \text{ mm}$
<i>One gear T=</i>	46	$D = 60,00 \text{ mm}$	$D1 = 57,50 \text{ mm}$	$D4 = 54,38 \text{ mm}$
<i>One gear T=</i>	50	$D = 65,00 \text{ mm}$	$D1 = 62,50 \text{ mm}$	$D4 = 59,38 \text{ mm}$
<i>One gear T=</i>	52	$D = 67,50 \text{ mm}$	$D1 = 65,00 \text{ mm}$	$D4 = 61,88 \text{ mm}$
<i>One gear T=</i>	60	$D = 77,50 \text{ mm}$	$D1 = 75,00 \text{ mm}$	$D4 = 71,88 \text{ mm}$
TOTAL =	Eleven gear			

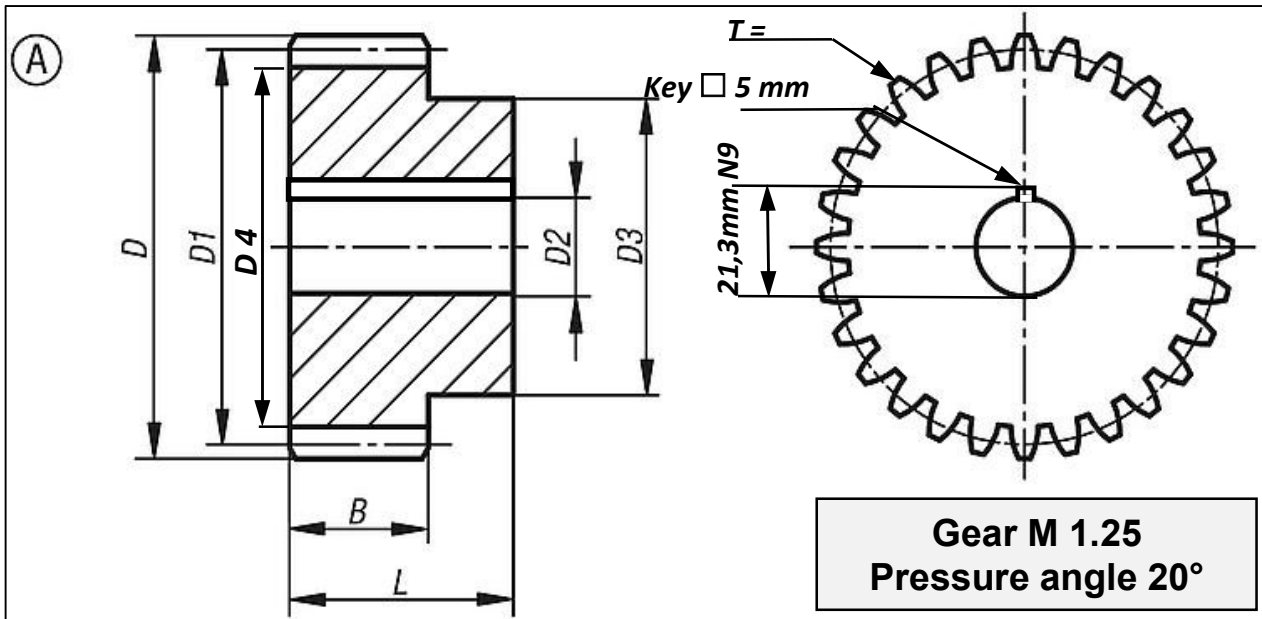