
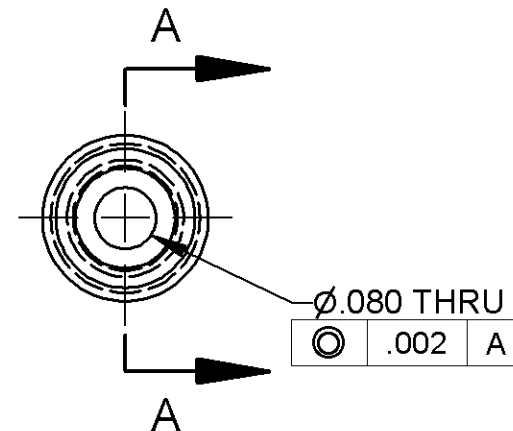
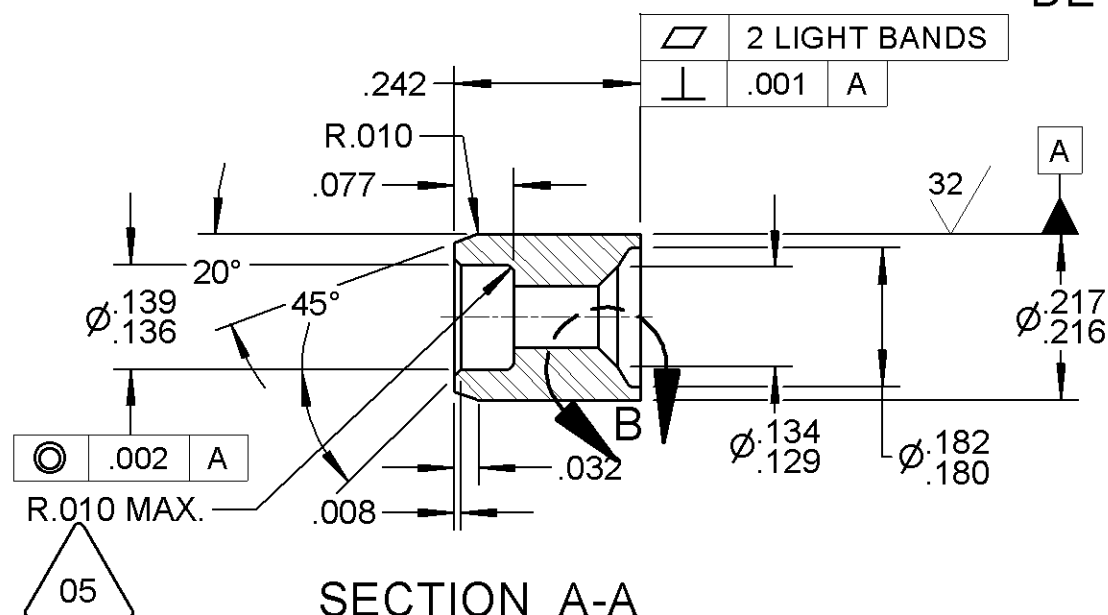


NOTE:

1. SEE BILL OF MATERIAL FOR SPECIAL REQUIREMENTS.
2. ALL DIMENSIONS ARE IN INCHES.
3. MARK PART PER (102).
4. LAPPED SURFACE TO BE COATED WITH "SEAL PEAL" WAX.

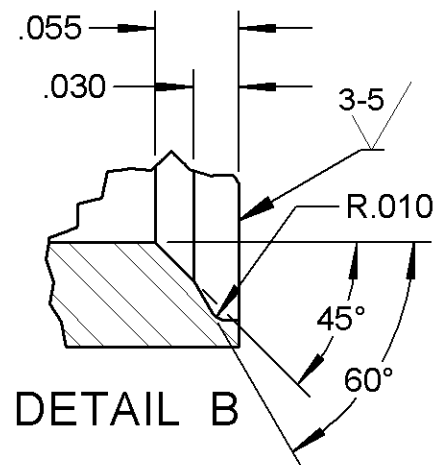


SECTION A-A

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. BREAK ALL SHARP EDGES .01 - .03 R OR 45°. INTERPRET DWG PER ASME Y14.5 STANDARD. SEE B/M FOR MATERIAL AND SPECIAL REQUIREMENTS. ITEM NUMBERS NOT APPEARING ON B/M DO NOT APPLY.

INV

05

REV.



TOLERANCE
UNLESS OTHERWISE
SPECIFIED

SURFACE TREATMENT

N/A

DO NOT SCALE

DRAWN BY:
S. WARD

DATE
10/11/02

CHECKED BY:
T. BELL

DATE
1/31/03

APPROVED BY:
D. BREAZEAL

DATE
1/31/03



Cooper Cameron Corporation
Cameron Division
P.O. Box 1212
Houston, TX 77251-1212

SEAL RING, 3 KSI WP,
1/8" SOLENOID VALVE

.X
± .015

ANGLES
± .5°

.XX
± .010

125

AA
ON
ALL
MACHINED
SURFACES

.XXX
± .005

SUPERSEDES

DATED

INITIAL USE B/M

2185818-06

SHEET
1 of 1

X-234212-06