


NOTES :

1. Material : SPCC $t=2.0\text{mm}$.
2. Treatment : BLACK PAINT.
3. Extruded hole with thread must can withstand 12kg-cm Min.
4. The thickness must keep at least 80% at its bend point and the inside bend radius 0.2mm Max.
5. Burrs' height can not exceed 5% of material thickness.
6. The radius of non-indicated corners and sharp edges is 0.3mm.
7. Part must clean and free of tool mark.
8. Products must be the same as engineering approval sample.
9. Any tooling modification must be approved by DELTA.
10. Products must meet DELTA general specification 10000-0002.
11. The banned substances must meet Delta 10000-0162 standard, and the "Taiwan Green Mark" requirements.
12. The dimension include "oval symbol" is the key dimension.

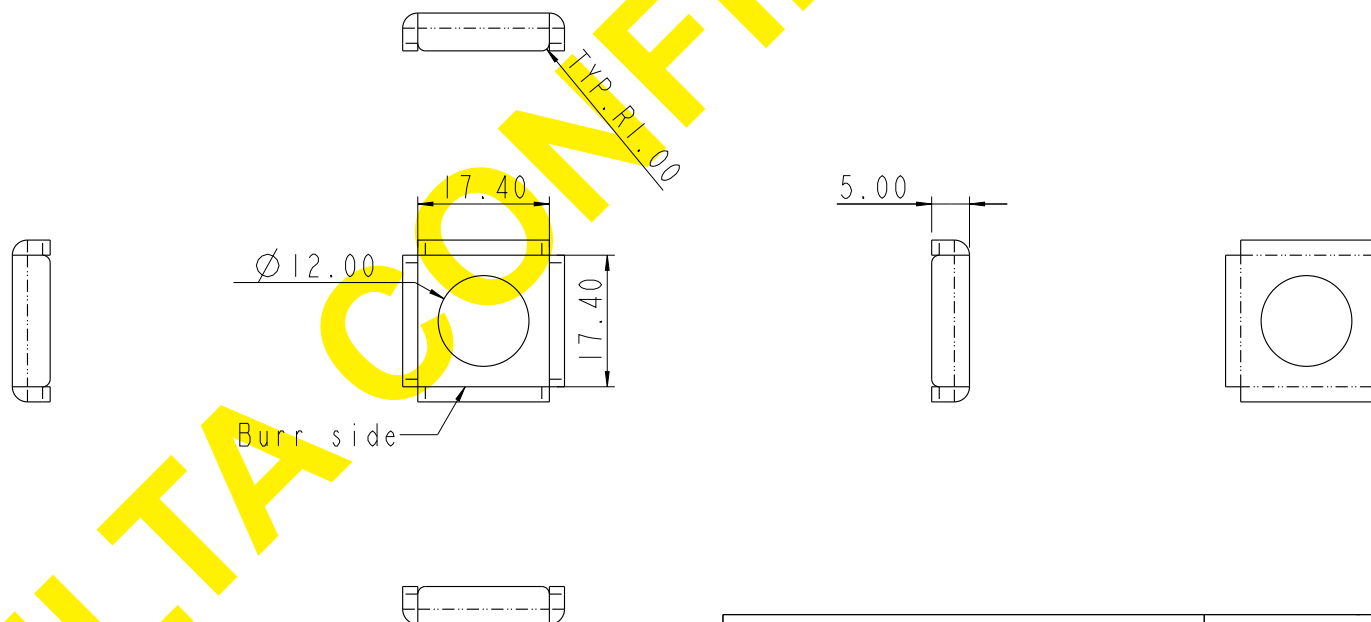

台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		Drawn: MACGYVER.KU	Design: MACGYVER.KU
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.		Description: SPACER SPCC CEILING MOUNT PAINT BLK	
DIMENSIONAL TOLERANCES () () () () <30 : ±0.25 DECIMALS UP-100 : ±0.2 250-300 : ±0.4 UP-600 : ±1.5 >30-100 : ±0.35 X : ±0.3 100-150 : ±0.25 300-350 : ±0.45 600-900 : ±2.4 >100-300 : ±0.5 X.X : ±0.2 150-200 : ±0.3 350-400 : ±0.5 900-OVER : ±3.1 ABOVE 300 : ±0.6 X.XX : ±0.1 200-250 : ±0.35		Part No. 3456954600	
SCALE 1:1 UNIT mm USED ON H7TLS-014		A4 SIZE SHEET 1 OF 1 ISSUE DATE: 2024/03/18	